


F108 SERIES LUMINAIRE



HCI
Heritage Casting & Ironworks

1280 Fewster Drive
Mississauga ON L4W 1A4
sales@hclighting.com
www.hclighting.com
Fax (905) 238-9060

Toll-free (800) 267-3175 Tel. (905) 238-2648

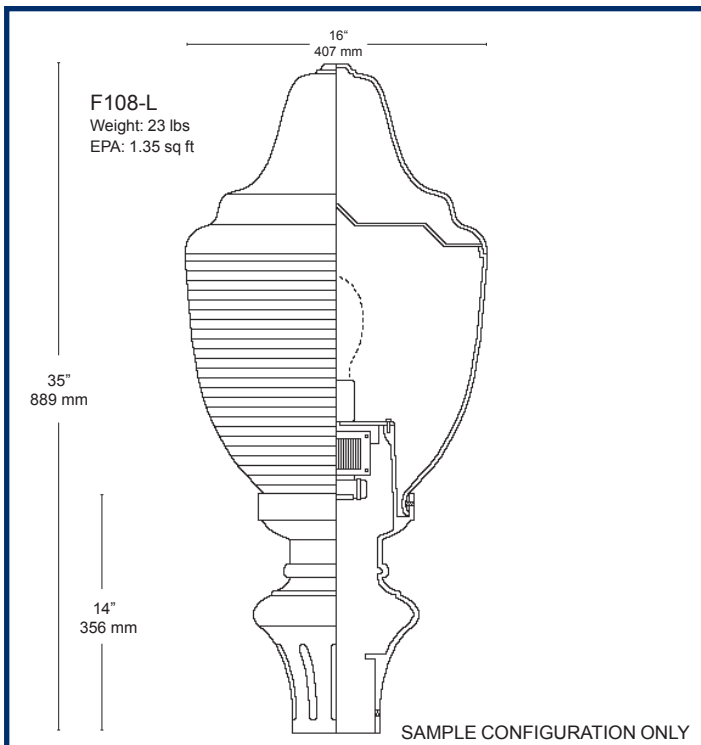

Materials. The **F108** Series luminaire shall consist of an injection-molded UV stabilized acorn-shaped diffuser with prismatic optics and a mechanically fastened slip fitter (capital). The three-piece diffuser shall consist of an upper, frosted (stippled) UV stabilized polycarbonate section, a perforated aluminum light lid and a lower, UV stabilized prismatic acrylic or polycarbonate refractor. The upper and lower sections of the luminaire together with the light lid shall be attached with a stainless steel clamp band. The diffuser shall be secured to the gasketed fitter with stainless steel hardware. The fitter shall be made of cast aluminum and shall house a ballast assembly. The ballast shall feature quick disconnect plugs for easy maintenance. The ballast shall be factory wired, tested and mounted on a key-holed cast aluminum plate together with a 4kV porcelain socket. Lamps are not included and shall be supplied by others. All electrical components shall be UL listed and labeled.

Installation. The fixture shall slip fit onto a 3" OD or 4" OD tenon (specify) and shall be secured to the pole with three sets of two s/s hex socket screws spaced 120° apart (exception: fitters "A" and "H" secure with four s/s bolts at 90° apart).

Finish. All applicable parts shall receive a standard electrostatically applied thermoset polyester powder coat smooth semi gloss finish with a four part corrosion inhibiting process.

To assemble a catalog number, list all codes sequentially.

1. SIZE (height varies with fitter, see #2)

F108-L (16"W x 35"H w/ "G" fitter) ☐

2. SLIP FITTER STYLE

A ☐



11"H

B ☐



8"H

C ☐



14"H

D ☐



8"H

F ☐



10-1/2"H

G ☐



14"H

H ☐



19"H

J ☐



12"H

K ☐



11"H

Q ☐



11"H

3. DIFFUSER TYPE

EAC External Prismatic Acrylic ☐

EPC External Prismatic Polycarbonate ☐

4. LIGHT SOURCE (indicate wattage)

50 - 250 MH _____W ☐

35 - 250 HPS _____W ☐

55, 85 or 165 Philips® QL¹ _____W ☐

CFL Fluorescent _____W ☐

INC Incandescent _____W ☐

5. VOLTAGE (circle connected voltage)

QT (Quad Tap 120, 208, 240, 277) ☐

TT (Tri Tap 120, 277, 347) ☐

NOTE: Please circle connected voltage. If none is indicated, factory will pre-wire at 120V.

120V Reactor ☐

480 Single ☐

6. OPTICS

BL bare lamp (standard for this fixture, due to external prismatic optics)

IES type III or V _____ (specify) ☐

For more information on optical systems, see *Options* section. Photometrics are also available in IES format - consult factory or your HCI sales representative.

7. FINIAL

FA ☐



FB ☐



FC ☐



NONE ☐

8. OPTIONS

FUS fuse in luminaire ☐

PCB luminaire integrated button type photocell ☐

HSS house side shield ☐

9. COLOR

Black RAL 9011 ☐

Green RAL 6005 ☐

Bronze RAL 8019 ☐

Grey RAL 7012 ☐

White RAL 9016 ☐

Custom ☐

NOTES

¹ QL is available in 120V or 240V for 55W and 85W systems. Please specify.