


# F101 SERIES LUMINAIRES



**HCI**  
Heritage Casting & Ironworks

1280 Fewster Drive  
Mississauga ON L4W 1A4  
sales@hcilighting.com  
www.hcilighting.com  
Fax (905) 238-9060

Toll-free (800) 267-3175 Tel. (905) 238-2648

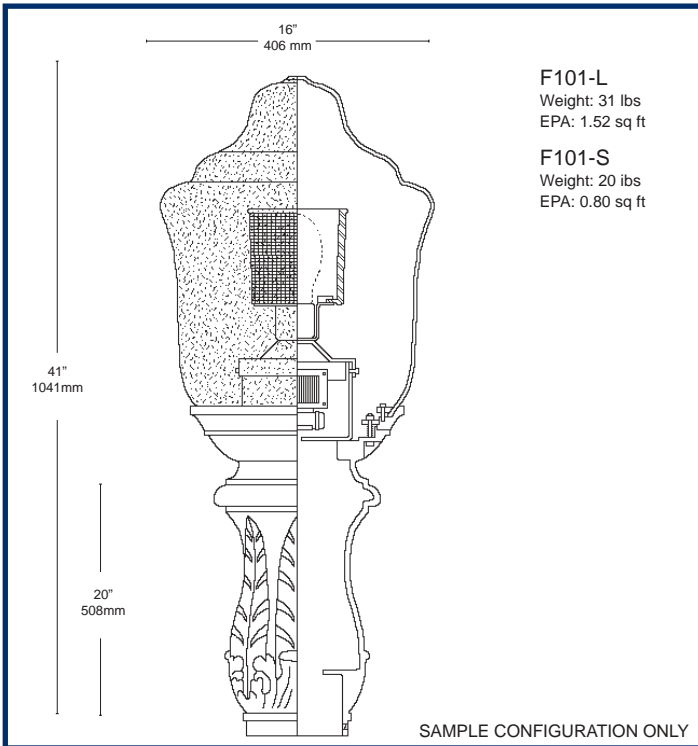

**F101-L**  
Weight: 31 lbs  
EPA: 1.52 sq ft

**F101-S**  
Weight: 20 lbs  
EPA: 0.80 sq ft

SAMPLE CONFIGURATION ONLY

**Description.** The **F101** Series luminaire shall consist of an injection-molded UV stabilized acorn-shaped diffuser, an internal optical system and a mechanically fastened slip fitter (capital). The diffuser shall be secured to the gasketed fitter with stainless steel hardware. [OPTION for F101-L only: quarter-turn twist lock system TWL with security bolt (illustrated at left)]. The cast aluminum fitter shall house a ballast assembly. The ballast shall feature quick disconnect plugs for easy ballast maintenance. The ballast shall be factory wired, tested and mounted on a keyholed cast aluminum plate together with a 4kV porcelain socket. Lamps are not included and shall be supplied by others. All electrical components shall be UL listed and labeled.

**Installation.** The fixture shall slip fit onto a 3" OD or 4" OD tenon (specify) and shall be secured to the pole with three sets of two s/s hex socket screws spaced 120° apart (exception: fitters "A" and "H" secure with four s/s bolts at 90° apart).

**Finish.** All applicable parts shall receive a standard electrostatically applied thermoset polyester powder coat smooth semi gloss finish with a four part corrosion inhibiting process.

**To assemble a catalog number,** list all codes sequentially.

## 1. SIZE (height varies with fitter, see #2)

- F101-L** (16"W x 41"H w/ "H" fitter)
- F101-S** (13"W x 25"H w/ "B" fitter)

## 2. SLIP FITTER STYLE

- |                                   |  |                                   |  |
|-----------------------------------|--|-----------------------------------|--|
| <b>A</b> <input type="checkbox"/> |  | <b>B</b> <input type="checkbox"/> |  |
| 11"H                              |  | 8"H                               |  |
| <b>C</b> <input type="checkbox"/> |  | <b>D</b> <input type="checkbox"/> |  |
| 14"H                              |  | 8"H                               |  |
| <b>F</b> <input type="checkbox"/> |  | <b>G</b> <input type="checkbox"/> |  |
| 10-1/2"H                          |  | 14"H                              |  |
| <b>H</b> <input type="checkbox"/> |  | <b>J</b> <input type="checkbox"/> |  |
| 19"H                              |  | 12"H                              |  |
| <b>K</b> <input type="checkbox"/> |  | <b>Q</b> <input type="checkbox"/> |  |
| 11"H                              |  | 11"H                              |  |

## 3. DIFFUSER TYPE

- WAC** White (opal) Acrylic
- WPC** White (opal) Polycarbonate
- FAC** Frosted (stippled) Acrylic
- FPC** Frosted (stippled) Polycarbonate

## 4. LIGHT SOURCE (indicate wattage)

- 50 - 250 MH** <sup>1</sup> \_\_\_\_\_W
- Option: pulse start ballast
- 35 - 400 HPS** <sup>1</sup> \_\_\_\_\_W
- 55, 85 or 165 Philips® QL** <sup>2,3</sup> \_\_\_\_\_W
- CFL** Fluorescent \_\_\_\_\_W
- INC** Incandescent \_\_\_\_\_W

## 5. VOLTAGE (circle connected voltage)

- QT** (Quad Tap 120, 208, 240, 277)
- TT** (Tri Tap 120, 277, 347)
- NOTE:** Please circle connected voltage. If none is indicated, factory will pre-wire at 120V.
- 120V** Reactor
- 480** Single

## 6. OPTICS

- BR** glass refractor IES type III or V \_\_\_\_\_
- LV** <sup>4</sup> louver reflector IES type V
- BL** bare lamp (suggested with white diffusers)

For more information on optical systems, see *Options* section. Photometrics are also available in IES format - consult factory or your HCI sales representative.

## 7. FINIAL

- FA**
- FB**
- FC**
- NONE**

## 8. OPTIONS

- TWL** <sup>4</sup> twist lock system
- FUS** internal fusing
- PCB** luminaire integrated button type photocell
- HSS** house side shield

## 9. COLOR

- Black** RAL 9011
- Green** RAL 6005
- Bronze** RAL 8019
- Grey** RAL 7012
- White** RAL 9016
- Custom**

## NOTES

- <sup>1</sup> F101-S is limited to 100W max.
- <sup>2</sup> F101-S is limited to 55QL max.
- <sup>3</sup> QL is available in 120V or 240V for 55W and 85W systems.
- <sup>4</sup> F101-L only