



LUMINAIRE DETAIL VIEW

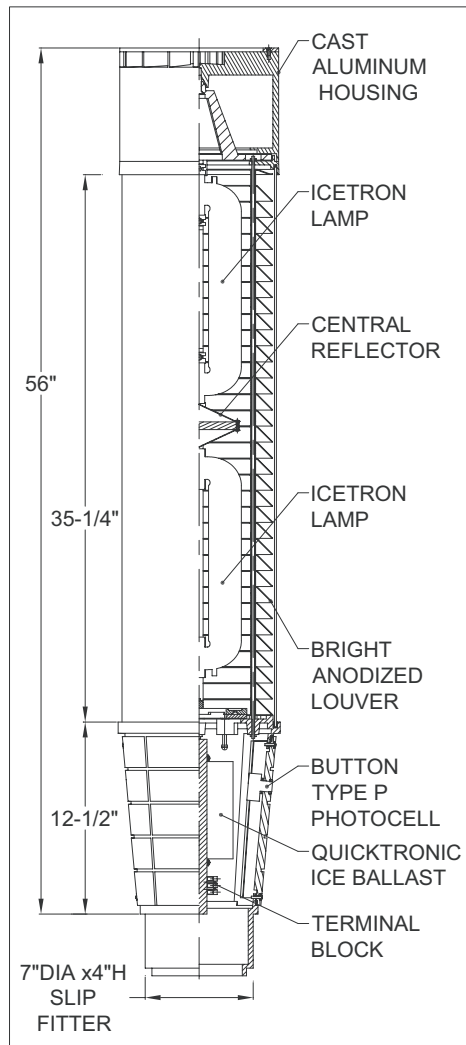

BOTTOM VIEW

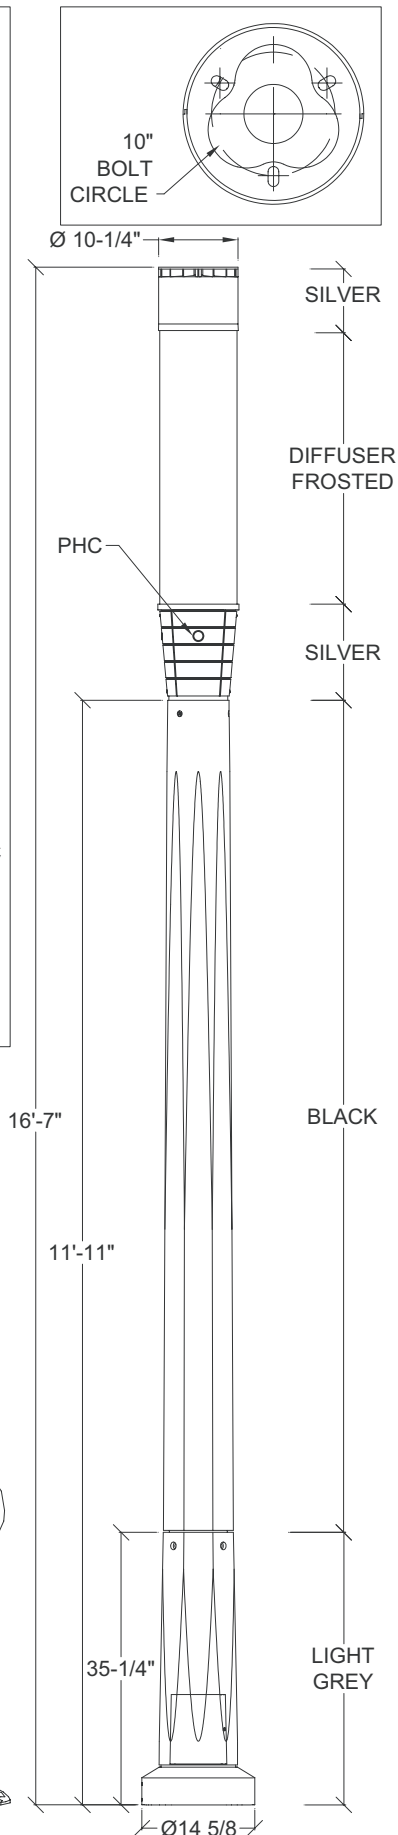

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____
 Date _____



Approval Drawing

Diffuser Type: Frosted

Diffuser Material: Acrylic U.V. stabilized. Tube 10"DIA, 1/8" wall thickness.

Optical System: Highly polished, stacked multi louver low-glare reflector IES Type V.

Top Housing Material: Heavy wall cast aluminum.

Ballast: Two QUICKTRONIC I.C.E. Electronic ballasts. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 2 x 150W

Voltage - 120V through 240V

Lamp: Two inductive ICETRON 150W lamps.

Photocontrol: Luminaire integrated button-type photocell (optional)

Pole: Pole of combined (round and octagonal) cross section (min. 0.400 TH) taper from 10" dia at the bottom to 8" dia at the top. It shall be made of heavy ductile cast iron produced according ISO 450-10. 7"W x 8"H hand hole for electrical work as necessary

Base Cover: Two piece attached to pole with four stainless steel screws.

Anchor Bolts: Three galvanized 3/4"(19mm) x 24" (610mm) long. Anchor bolts and metal template are supplied by HCI

Finish: Electrostatically applied, thermoset polyester powder-coat finish for fixture and sprayed-on acrylic polyurethane for pole.

Colour: Silver PCT73106 - Fixture
 Jet Black RAL 9005 - Shaft
 Light Grey RAL 7035 - Base

Date: Mar.4, 2003 Drawing No: 4335
 Model: F165-L-FAC-(2)150ICE-120V-LV-5-PCBL1-P600

Project: Alliance for Downtown New York

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
 Tel: (905) 238-2648 Fax: (905) 238-9060
 Toll Free Canada & USA 1-800-267-3175
 E: sales@hclighting.com WEB: www.hclighting.com