



Technical Application Guide for LED Downlight

DL100A-5-10.5W-D

Introduction



DL100 Surface mounted LED downlight adopts compact slim design, looks elegant. The special optical diffuser can increase central candela intensity by more than 30%, provide soft and comfortable lighting. Easy to install into most of standard J-boxes.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- 90° wide beam angle
- CCT: 2700K/3000K/3500K/4000K/5000K Selectable
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes


- Damp location
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

Application Areas

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.



Product Information

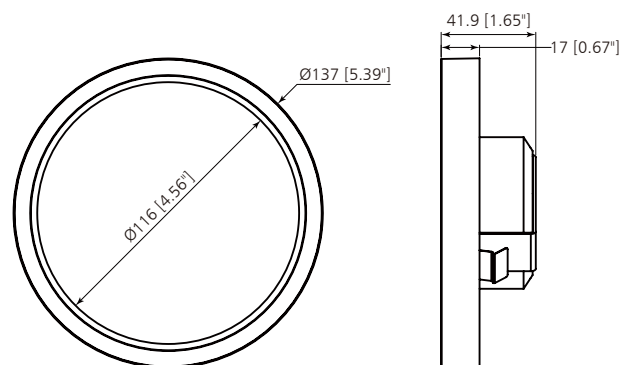

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
UP-DL100A-5-10.5W-D	AC120V	10.5W	≥0.9	820	90°	2700K/3000K/3500K/4000K/5000K Selectable	40000h	≥80	Yes	Ø137*41.9mm
UP-DL100A-5-10.5W-D	AC120V	10.5W	≥0.9	820	90°	2700K/3000K/3500K/4000K/5000K Selectable	40000h	≥80	Yes	Ø137*41.9mm
UP-DL100A-5-10.5W-D	AC120V	10.5W	≥0.9	850	90°	2700K/3000K/3500K/4000K/5000K Selectable	40000h	≥80	Yes	Ø137*41.9mm
UP-DL100A-5-10.5W-D	AC120V	10.5W	≥0.9	850	90°	2700K/3000K/3500K/4000K/5000K Selectable	40000h	≥80	Yes	Ø137*41.9mm

Remarks: All above lumens are subject to 4000K, please check IES files for accurate data

Driver data Sheet

Driver data	DIM
Input rated Voltage	AC120V
Frequency	60Hz
Input Voltage	AC120V
Efficiency	≥78%
Total load Wattage	10.5W±0.5W
Power Factor	≥0.9
Rated input current	≤0.12A
Full load output Voltage	DC24-38V
Rated output current	300mA
Output current range	300mA±5%
Power tolerance	±5%
Current output tolerance	±5%
Dimming range	8%-100%
Dimmer	Triac dimmers
Short circuit protection	PASS
Over voltage protection	PASS
Over temperature protection	PASS
THD	≤20%
Withstand voltage	—

Fixture Compatibility

Rated Wattage	With Ground	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
10.5W	YES	Damp location	-20°C~45°C	0~90%	-20°C~65°C

Installation

1. Loosen the screws of octagon J-BOX or Round J-BOX.
2. Align and secure J-BOX MOUNTING PLATE to J-BOX using MOUNTING SCREWS.
NOTE: J-BOX MOUNTING GROUND WIRE must face room side.
Make sure J-BOX MOUNTING PLATE is firmly against the ceiling.
Do not over-tighten MOUNTING SCREWS; this could distort J-BOX MOUNTING PLATE. (FIG. 1)
3. Pull supply wires from J-BOX through hole in J-BOX MOUNTING PLATE (FIG. 2)
4. For wet location, see FIG 4.
5. While supporting LUMINAIRE BODY, Make electrical connections:
black lead to hot (Black) supply lead; white lead to neutral (White) supply lead.
Un-insulated wires are ground wires (ground J-BOX mounting lead and ground luminaire lead) and must be connected to grounding terminal or ground (Green) supply lead inside J-BOX. Use WIRE NUTS to make connections (FIG. 2)
6. Carefully push connections back into J-BOX
7. Align 2 SPRINGS and DRIVER on the LUMINAIRE BODY to the opening in the J-BOX MOUNTING PLATE. Snap LUMINAIRE BODY into plate.

CAUTION: MAKE CERTAIN THAT NO WIRES ARE PINCHED BETWEEN J-BOX MOUNTING PLATE AND LUMINAIRE BODY.

To remove luminaire body from ceiling pull straight down.

Driver replacement: Inseparable luminaire. Do not attempt to service.
Replace entire fixture.

CAUTION: For wet locations. In accordance with Underwriters Laboratories requirements, a line of caulking compound such as acrylic latex or silicone must be placed around the perimeter of backplate also contacting the flange (as shown) to seal against mounting surface keeping water away from the outlet box and back opening. (FIG. 4)
cULus listed for wet locations (ceilings).

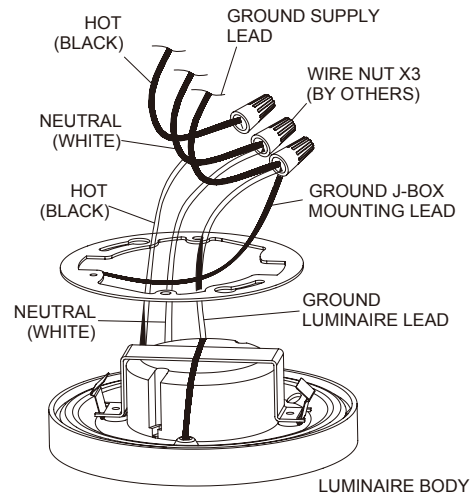
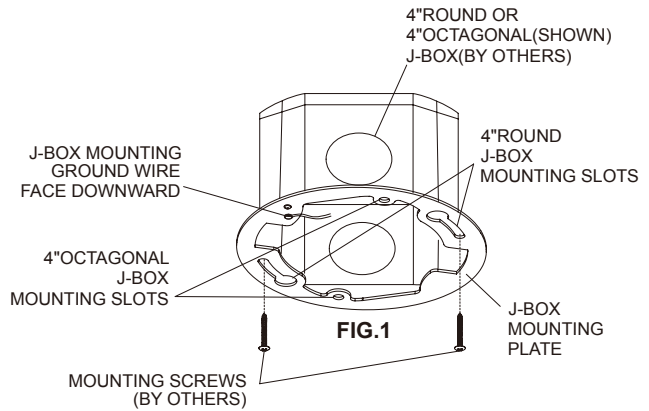


FIG. 2

J-BOX REMOVED FOR CLARITY

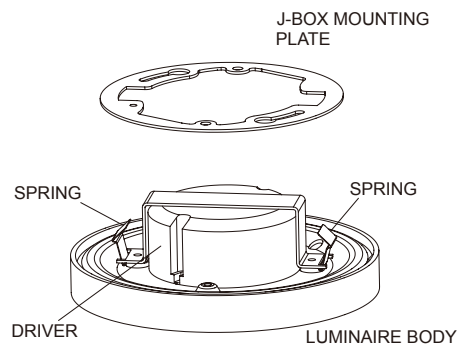


FIG. 3

J-BOX & WIRES REMOVED FOR CLARITY

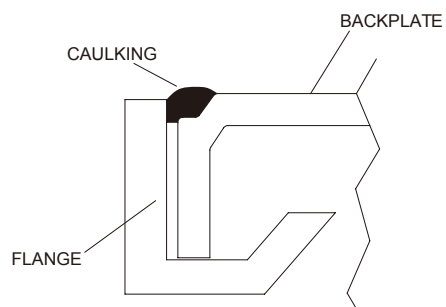


FIG. 4

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	51*49*39	0.36	25.8	54

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	284	15336	28
40" standard container	568	30672	56

