


Approval Drawing

Light Std:F123-L-A322-2A-P470-75TFS-15

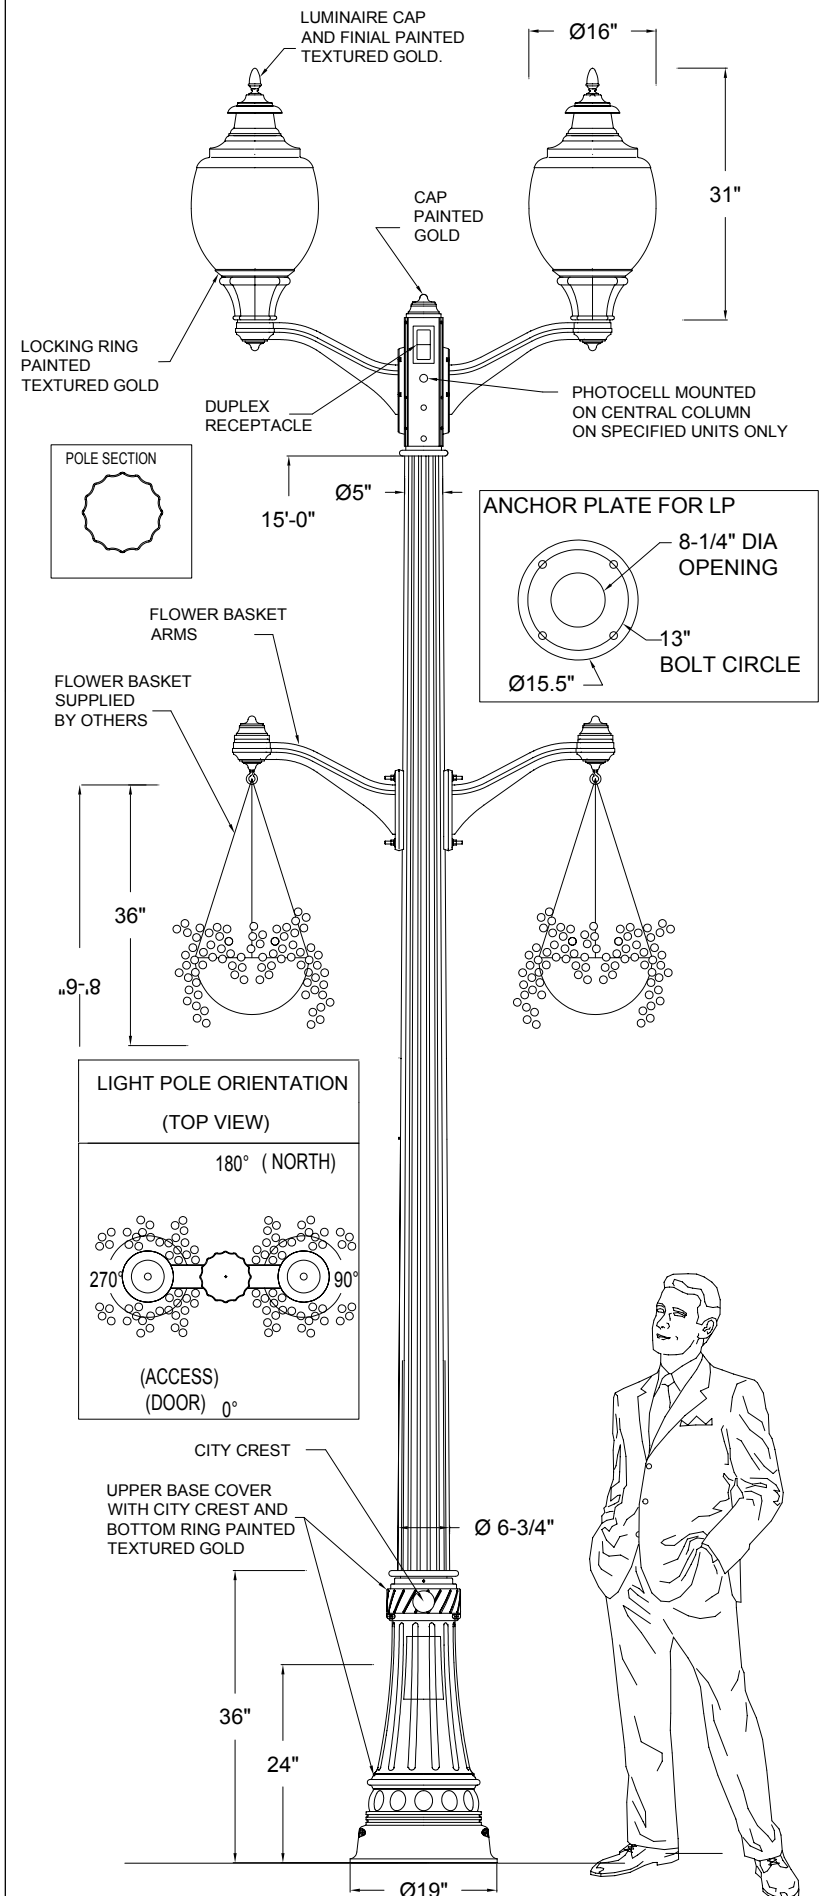

Luminaire:
F123-L-E4-FPC-200MH-120V-SR5
See detail DWG # 4041B

Photocontrol: Button type photocell 120V

Receptacle: Duplex

Arm: Cast aluminum
Arm Configuration: 2A

Flower Basket Arm: Cast aluminum

Pole: ASTM A513 11 gauge fluted steel, with 16 flutes. The shaft shall taper from 6.75" dia at the top of base to 5" dia at the top.

Base Cover: Two-piece cast aluminum with a two-piece donut.

Anchor Bolts: 4 galvanized 1" (25mm) x 36" (915mm) long. Anchor bolts and metal template are supplied by HCI.

Finish: Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

Colour: HCI Black texture with gold accents.

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____

Date _____

LIGHT POLE TYPE LP2

Date: May6, 2002 Drawing No: 4078 - 2
Model: F123-L-E4-FPC-200MH-120V-SR5-PCB1L-DRT-A322-2A-P470-75TF-S-15-A322-FB
Project: KING ST. W.

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com