

# F121-LED SERIES

## SPECIFICATIONS



**Housing**

Made from heavy duty die cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	-	-	-	-	-	-
Small	14"	14"	30.5"	18 lbs	3"(W) x 4"(L)	1.00 ft <sup>2</sup>

## PHOTOMETRICS

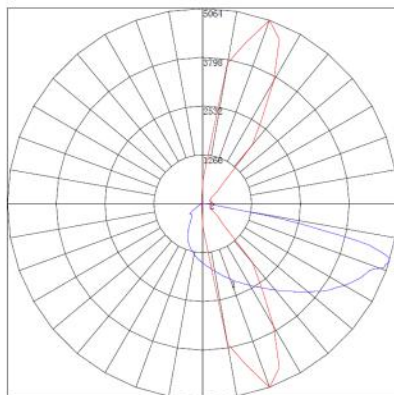

← polar graph

**SAMPLE ILLUSTRATION**  
IES type III, medium

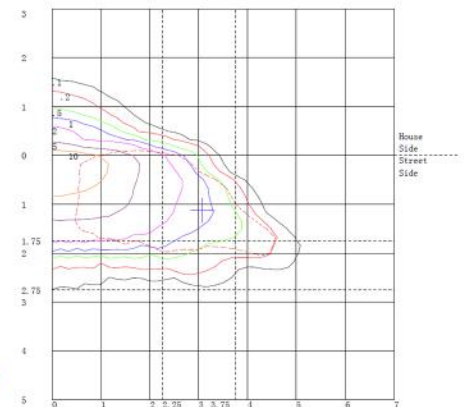

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F121-S	R	EAC EXTERNAL PRISMATIC ACRYLIC	LED 35W 50W 55W 70W	3000K 4000K 5000K  ± 10% VARIANCE	120V~277V	IES TYPE II (2) III (3) IV (4) V (5)	N/A	FE	Silver

Product ordering sample

F121 - S - R - EAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FE - SILVER