


Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

- ☐ APPROVED
☐ APPROVED AS NOTED
☐ REJECTED
☐ REVISE AND RESUBMIT





By _____

Date _____

BOTTOM VIEW



MOUNTING PLATE DETAIL

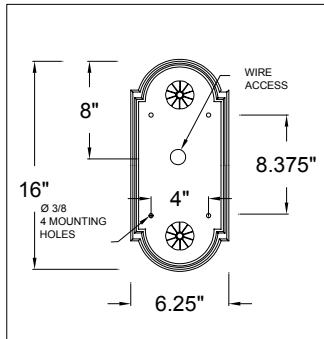

Approval Drawing

Light Std: F144-L/S-VC-M-WS-P405-4P

Diffuser Type: Clear

Diffuser Material: Acrylic
U.V. stabilized.

Optical System: Prismatic heat resistant borosilicate glass refractor

Light distribution: Type V

Luminaire Housing: The whole luminaire is made of cast aluminum. Top is fully hinged for easy access to lamp and ballast.

Ballast: HPS high power factor mounted on removable plate. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 175W

Voltage - 347V

Socket - Medium (4KV).

Photocontrol: None.

Arm: Cast aluminum

Pole: 4" O.D. x .226 wall 6061 T6 Aluminum extrusion.

Base Cover: One-piece cast aluminum welded to pole.

Anchor bolts: 4 galvanized 3/4" (19mm) x 24" (610mm) long.

Anchor bolts and metal template are supplied by HCI.

Finish: Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

Colour: BRONZE RAL # 8019

Date: Aug 2, 2002 Drawing No: 4221A
Model: F144-L - CAC-175MH-347V-BR-5-P405-4P-10
F144-S-CAC-175MH-347V-BR5-VC-M
Project: HERITAGE TOWN CTR

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com