


LUMINAIRE DETAIL VIEW

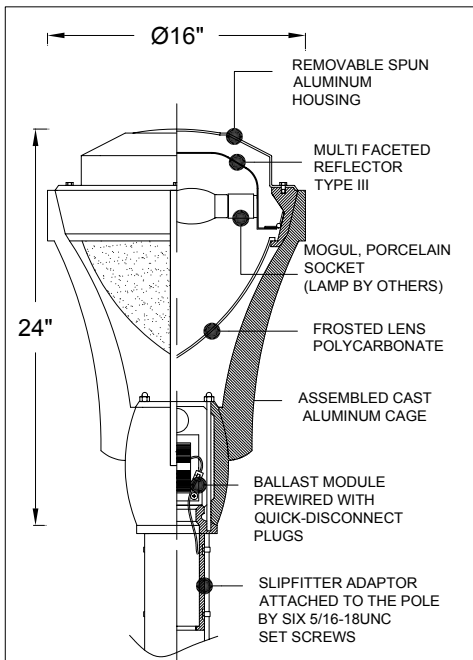


Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI


- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____
Date _____


BOTTOM VIEW

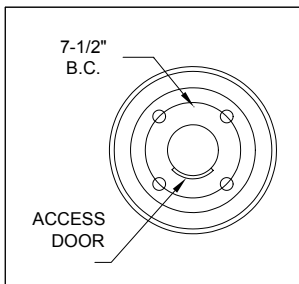

NOTE: not for sale in the U.S.

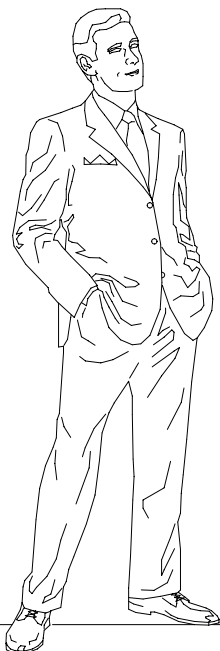

Pole 12FT, 80mph = 7.50 sq ft
Luminaire = 1.65 sq ft

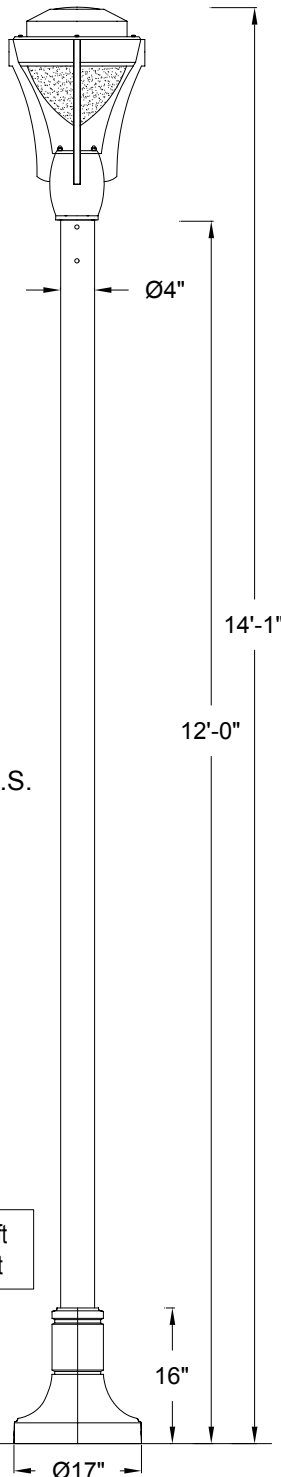

Approval Drawing

Light Std: CF36-P429-4P

Diffuser Type: Frosted.

Diffuser Material: Polycarbonate U.V. stabilized.

Optical System: Precision formed, segmented roadway type, cut-off reflector.

Light distribution: IES Type III

Luminaire Housing: All cast aluminum components are connected with four arms to complete cage of luminaire. The luminaire is attached to slipfitter adaptor with prewired ballast components by four 1/4-20UNC hex-head bolts.

Ballast: MH high power factor mounted on removable slipfitter. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 100W

Voltage - PLEASE SPECIFY

Socket - Mogul (4KV).

Photocontrol: None.

Pole: 4"OD x .226" (6mm) TH aluminum tubing welded to cast aluminum base plate.

Base Cover: Two-piece cast aluminum attached to pole with four tamper-resistant stainless steel screws.

Anchor bolts: 4 galvanized 3/4" (19mm) x 24" (610mm) long. Anchor bolts and metal template are supplied by HCI.

Finish:Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

Colour: PLEASE SPECIFY

Date: May 04, 2004 Drawing No: 4447-1

Model: CF36-FPC-100MH-VOLT-SR-3
-P429-4PC-12-Color

Project: N/A

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com

(C) 2004 HCI (Heritage Casting & Ironworks). Illustrations are copyrighted. Unauthorized reproduction prohibited. In an ongoing effort to improve quality/design, Heritage reserves the right to modify specifications without notice.