

## B807 Lighted Bollard



### Description

The body of the bollard is made from cast aluminum and extrusion to withstand harsh weather. The lighted bollard is equipped with a cast aluminum fixture head on top with a choice of light sources, and is secured with three (3) stainless steel screws.

The LED shall feature quick disconnect plugs for easy maintenance. The LED shall be factory wired, tested and mounted on a cast aluminum plate.

All electrical components shall be UL listed and labeled.

### Specification

#### Housing

Made from cast aluminum to withstand harsh weather.

#### Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

#### Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance (Applicable for LED strip)


#### Exterior Design & Finish

Bollard is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



**Dimensions**

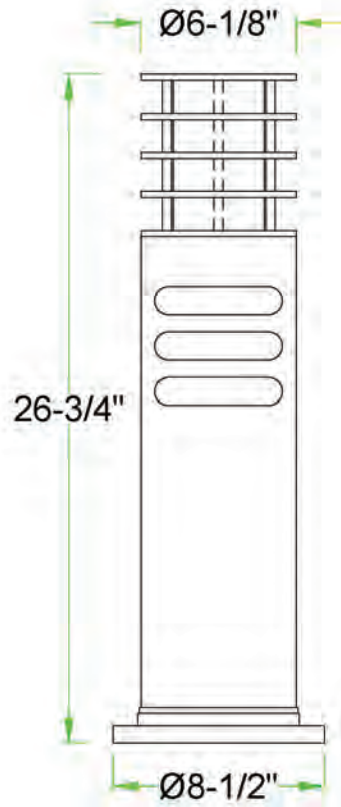

**Product Ordering Number**

PRODUCT	LUMENS	CCT	VOLTAGE	SOCKET	OPTIONS
B807	Max 4400 LMS with LED strip	2700K 3000K 4000K 5000K 6000K  =10% Variance	120V-277V	E26(4KV) E39(5KV) Only applicable for Bulb	LED strips LED bulbs

**DIFFUSER TYPE**

**FAC** Frosted acrylic

**Color**

Standard RAL  
6005 Green  
7012 Grey  
8019 Bronze  
9011 Black/Txt  
9016 White  
Custom RAL

