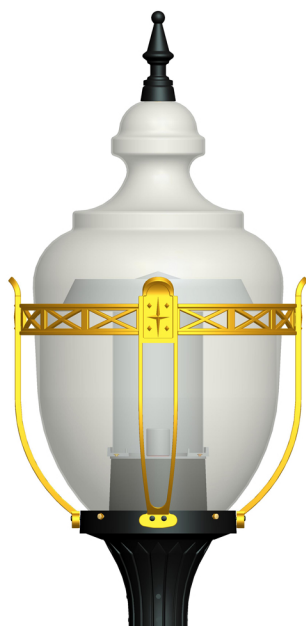


PRODUCT TECHNICAL DATA SHEET

F114-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


| | length | width | height | weight | tenon size | EPA |
|-------|--------|-------|--------|--------|---------------|----------------------|
| Large | 20" | 20" | 37" | 25 lbs | 3"(W) x 4"(L) | 1.60 ft ² |
| Small | - | - | - | - | - | - |

PHOTOMETRICS

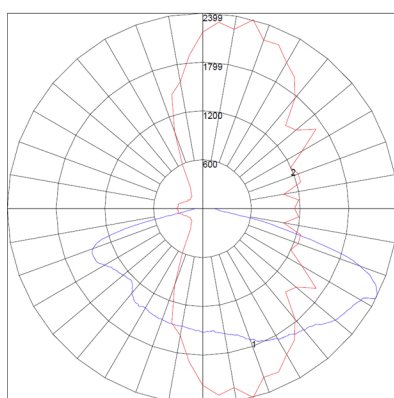

SAMPLE ILLUSTRATION
IES type III, short

◀ polar graph

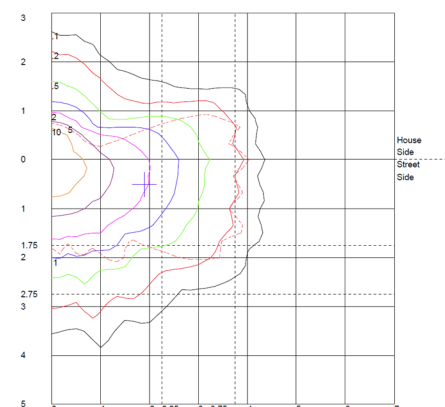

ISO footcandle ▶

| PRODUCT | FITTER | DIFFUSER TYPE | WATTAGE | CCT | VOLTAGE | OPTICS | OPTIONS | FINIALS | COLOR |
|---------|--------|-----------------------|---------|----------------|-------------|----------|-----------------------|---------|--------------------|
| F114-L | A | FAC | LED | 3000K | 120V~277V | IES TYPE | DIM | FA | STANDARD RAL |
| | B | FROSTED ACRYLIC | 35W | 4000K | | II (2) | DIMMING CONTROL | FB | 6005 GREEN |
| | C | | 50W | 5000K | STEP DOWN | III (3) | | FC | 7012 GREY |
| | D | FPC | 55W | 6000K | TRANSFORMER | IV (4) | FUS | FD | 8019 BRONZE |
| | E | FROSTED POLYCARBONATE | 70W | | 347V | V (5) | INTERNAL FUSING | FE | 9011 BLACK |
| | F | | 90W | ± 10% VARIANCE | 480V | | PCB | FF | 9016 WHITE |
| | G | WAC | 120W | | | | BUTTON TYPE PHOTOCELL | FG | *TEXTURE AVAILABLE |
| | H | WHITE ACRYLIC | | | | | PEC | FH | CUSTOM RAL |
| | I | | CUSTOM | | | | TWIST LOCK PHOTOCELL | FI | |
| | J | | | | | | HSS | FJ | |
| | K | | | | | | HOUSE SIDE SHIELD | NONE | |
| | L | | | | | | TWL | | |
| | Q | | | | | | TWIST LOCK SYSTEM | | |
| | R | | | | | | WIRELESS CONTROL | | |
| | T | | | | | | AVAILABLE | | |
| | U | | | | | | | | |

Product ordering sample

F114 - L - A - FAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK