


ACORN LUMINAIRES: F121 (RICHMOND)

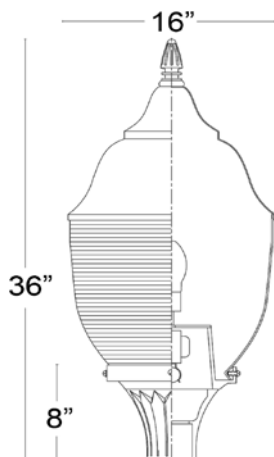

F121-L

Weight: 20 lbs.
 EPA: 1.40 sq. ft.
 Size: 16" W x 36" H

F121-S

Weight: 18 lbs.
 EPA: 1.00 sq. ft.
 Size: 14" W x 30-1/2" H



Specification Features

- Ornamental heavy gauge cast aluminum base
- Quick disconnect ballast system mounted on removable plate
- Integrated button photocell optional
- Suitable for wet locations
- Variety finials optional (see page 3)
- E39 mogul base or E26 medium base optional
- Powder coated finish
- Fixture has a large and small size optional

Product Ordering Number

F121-L	—	A-11" H	—	EAC	—	250W MH	—	120V	—	BL IES 3	—	FA	—	FUS	—	RAL 9011
SIZE	FITTER STYLE	DIFFUSER TYPE	LIGHT SOURCE	VOLTAGE	OPTICS	FINIAL	OPTIONS	COLOR								
F121 — L	A — 11" H	EAC	Up to 250 MH ¹	QT	BL	FA	FUS	Black								
F121 — S	B — 8" H	External prismatic acrylic	Options:	(Quad tap 120, 208, 240, 277)	Bare lamp IES type III or V	FB	Internal fusing	RAL 9011								
	C — 14" H		Pulse start ballast			FC										
	D — 8" H	EPC	Up to 250 HPS ¹	TT		FD	PCB	GREEN								
	E — 9-1/2" H	External prismatic polycarbonate	55, 85, 165 with Philips ^{2, 3} QL	(Tri tap 120, 277, 347)		FE	Luminaire integrated button type photocell	RAL 6005								
	F — 10/12" H			120V Single		FF		BRONZE								
	G — 14" H					FG		RAL 8019								
	H — 19" H		CFL	480 Single		FH										
	I — 9-1/2" H		Fluorescent			FI	PEC	GREY								
	K — 11" H					FJ	Luminaire integrated locking photocell ⁴	RAL 7012								
	L — 13-1/4" H		INC			NONE		WHITE								
	R — 11-1/3" H		Incandescent					RAL 9016								
	Q — 11" H		LED	Please indicate voltage.												
	T — 7-3/4" H		Please contact HCI sales	If not specified factory will pre-wire at default 120v.			HSS	CUSTOM								
	Please refer to page 3.					Please refer to page 3.	House side shield									

NOTES

¹ F121-S is limited to 100W max. ² F121-S is limited to 55QL max. ³ QL is available in 120V or 240V for 55W and 85W systems. Please specify. ⁴ Available with fitter "A" and "L" only.