

# F123-LED SERIES

## SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	16.5"	16.5"	42"	25 lbs	3"(W) x 4"(L)	1.55 ft <sup>2</sup>
Small	14"	14"	37"	20 lbs	3"(W) x 4"(L)	1.45 ft <sup>2</sup>

## PHOTOMETRICS

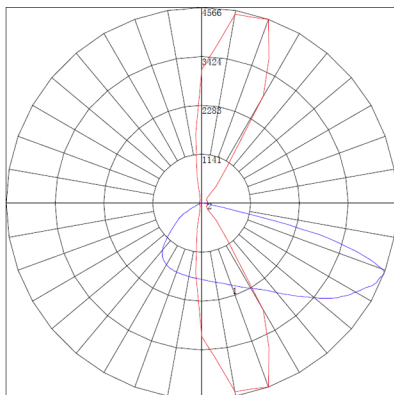

SAMPLE ILLUSTRATION  
IES type II, medium

← polar graph

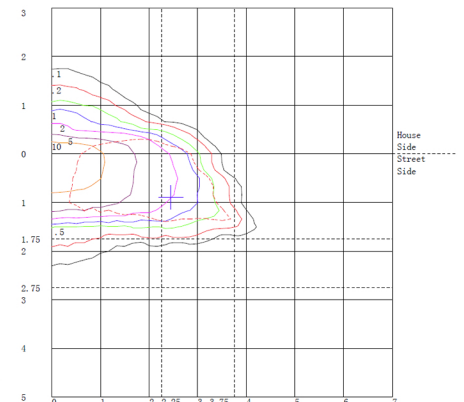

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F123-L	A	FAC	LED	3000K	120V~277V	IES TYPE II (2)	DIM DIMMING CONTROL	FA	STANDARD RAL
F123-S	B	FROSTED ACRYLIC	35W	4000K	STEP DOWN TRANSFORMER	III (3)	FUS INTERNAL FUSING	FB	6005 GREEN
	C	FPC FROSTED POLYCARBONATE	50W	5000K		IV (4)		FE	7012 GREY
	D		55W	6000K		V (5)		FD	8019 BRONZE
	E		70W	± 10% VARIANCE		480V		FE	9011 BLACK
	F	90W	FF			9016 WHITE			
	G	120W	FG	*TEXTURE AVAILABLE					
	H	WAC WHITE ACRYLIC	CUSTOM	PEC TWIST LOCK PHOTOCELL	FH	CUSTOM RAL			
	I	CUSTOM		PCB BUTTON TYPE PHOTOCELL	FI				
	J			PEC TWIST LOCK PHOTOCELL	FJ				
	K			HSS HOUSE SIDE SHIELD	NONE				
	L			TWL TWIST LOCK SYSTEM					
Q	CUSTOM	WIRELESS CONTROL AVAILABLE							
R									
T									
U									

Product ordering sample F123 - L - A - FAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK