

F123 LED Series



Description

The F123 Series luminaire shall consist of an injection-molded UV stabilized conically shaped diffuser, an internal optical system and a mechanically fastened slip fitter (capital). The globe shall be secured to the gasketed fitter with stainless steel hardware. The fitter shall be made of cast aluminum and shall house an LED assembly. The LED shall feature quick disconnect plugs for easy maintenance. The LED shall be factory wired, tested and mounted on a keyholed cast aluminum plate. All electrical components shall be UL listed and labeled.

Specification

Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI 70.


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



Dimensions

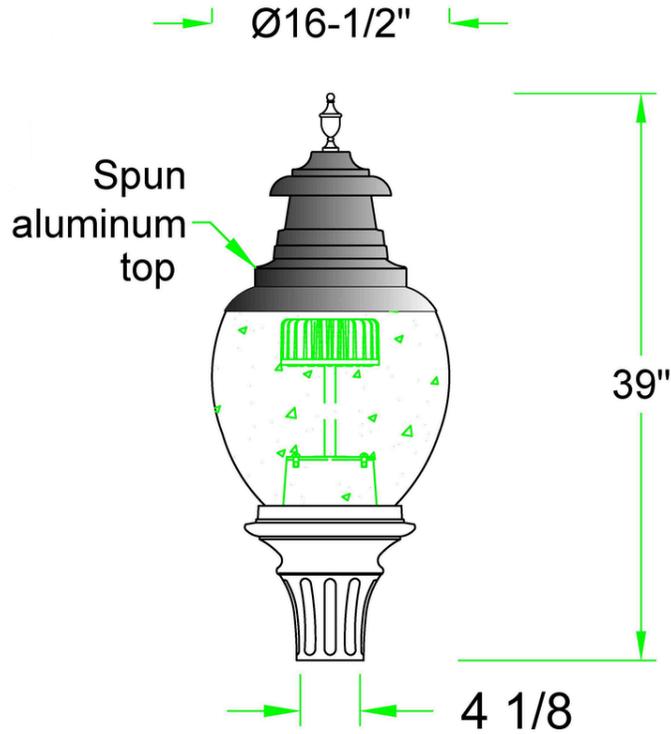

Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGES	OPTICS	OPTIONS	FITTER	FINIAL	
F123	Max	3000K	120v-277v	IES	DIM	A, B	FA	
	Module	4000K	347V	TYPE	Dimming control	C, D	FB	
	12600 Lms		5000K	480V	II (2)	PCB	E, F	FC
			6000K		III (3)	Button-type	G, H	FD
					IV (4)	photo- cell	I, J	FE
					V (5)	HSS	K, L	FF
						House side shield	M, Q	FG
							R, T	FH
							U	FI, FJ

DIFFUSER TYPE

- CACX Clear acrylic textured
- CPCX Clear polycarbonate textured
- FACX Frosted acrylic textured
- WACX White acrylic textured

Color

- Standard
- RAL
- 6005 Green
- 7012 Grey
- 8019 Bronze
- 9011
- Black/Txt
- 9016 White
- Custom RAL

