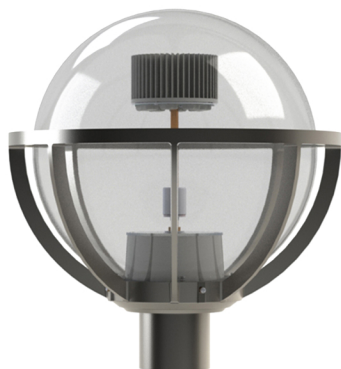


## PRODUCT TECHNICAL DATA SHEET

## F125-LED SERIES

## SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	22"	22"	27"	28 lbs	3"(W) x 4"(L)	1.62 ft <sup>2</sup>
Small	18"	18"	24"	16 lbs	3"(W) x 4"(L)	1.25 ft <sup>2</sup>

## PHOTOMETRICS

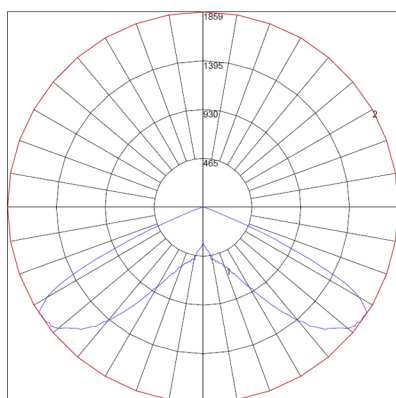

**SAMPLE ILLUSTRATION**  
IES type V, short

← polar graph

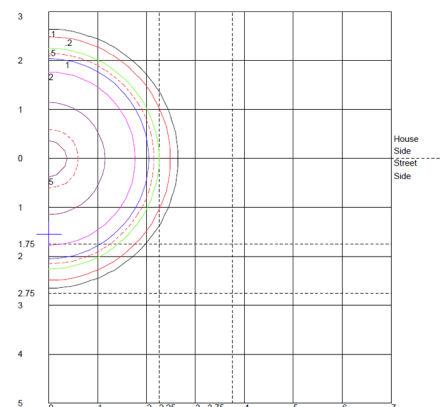

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE		CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F125-L	A	CAC CLEAR ACRYLIC	LED	CORN LAMP	3000K	120V~277V	IES TYPE	DIM	N/A	STANDARD RAL
F125-S	B		35W	27W	4000K		II (2)	DIMMING CONTROL		6005 GREEN
	C	CPC CLEAR POLYCARBONATE	50W	36W	5000K	STEP DOWN	III (3)	FUS		7012 GREY
	D		55W	45W	6000K	TRANSFORMER	IV (4)	INTERNAL FUSING		8019 BRONZE
	E	EAC EXTERNAL PRISMATIC	70W	54W		347V	V (5)			9011 BLACK
	F	ACYLIC	90W	80W	± 10%	480V		PCB		9016 WHITE
	G		120W		VARIANCE			BUTTON TYPE PHOTOCELL		*TEXTURE AVAILABLE
	H	EPC EXTERNAL PRISMATIC						HSS		CUSTOM RAL
	I	POLYCARBONATE						HOUSE SIDE SHIELD		
	J							TWL		
	K	FAC FROSTED ACRYLIC						TWIST LOCK SYSTEM		
	L									
	Q	FPC FROSTED POLYCARBONATE								
	R							WIRELESS CONTROL		
	T	WAC WHITE ACRYLIC						AVAILABLE		
	U	WPC WHITE POLYCARBONATE								

**Product ordering sample**

F125 - L - A - CAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK