

PRODUCT TECHNICAL DATA SHEET

F126-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES

| | length | width | height | weight | tenon size | EPA |
|-------|--------|-------|--------|--------|---------------|----------------------|
| Large | 16.5" | 16.5" | 35" | 31 lbs | 3"(W) x 4"(L) | 2.20 ft ² |
| Small | - | - | - | - | - | - |


PHOTOMETRICS

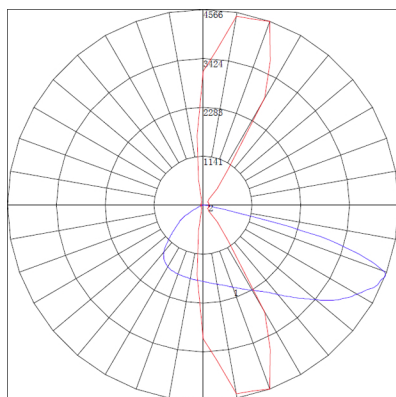

SAMPLE ILLUSTRATION
IES type II, medium

◀ polar graph

ISO footcandle ▶

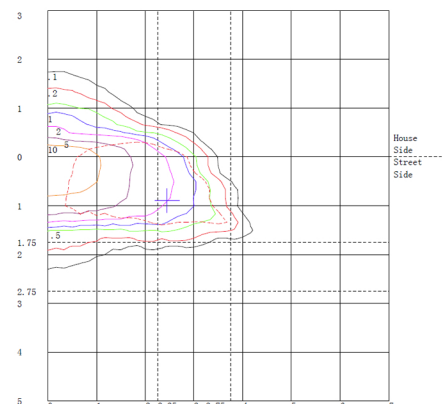

| PRODUCT | FITTER | DIFFUSER TYPE | WATTAGE | CCT | VOLTAGE | OPTICS | OPTIONS | FINIALS | COLOR |
|---------|--------|---------------------------|---------|----------------|-------------|----------|------------------------|---------|--------------------|
| F126-L | A | CAC CLEAR ACRYLIC | LED | 3000K | 120V~277V | IES TYPE | DIM | FA | STANDARD RAL |
| | B | | 35W | 4000K | | II (2) | DIMMING CONTROL | FB | 6005 GREEN |
| | C | CPC CLEAR POLYCARBONATE | 50W | 5000K | STEP DOWN | III (3) | | FC | 7012 GREY |
| | D | | 55W | 6000K | TRANSFORMER | IV (4) | FUS | FD | 8019 BRONZE |
| | E | CTG CLEAR TEMPERED GLASS | 70W | | 347V | V (5) | INTERNAL FUSING | FE | 9011 BLACK |
| | F | | 80W | ± 10% VARIANCE | 480V | | | FF | 9016 WHITE |
| | G | FAC FROSTED ACRYLIC | 90W | | | | PCB | FG | *TEXTURE AVAILABLE |
| | H | | 120W | | | | BUTTON TYPE PHOTOCCELL | FH | |
| | I | FPC FROSTED POLYCARBONATE | | | | | | FI | CUSTOM RAL |
| | J | | CUSTOM | | | | HSS | FJ | |
| | K | WAC WHITE ACRYLIC | | | | | HOUSE SIDE SHIELD | | |
| | L | | | | | | | NONE | |
| | Q | WPC WHITE POLYCARBONATE | | | | | | | |
| | R | | | | | | TWL | | |
| | T | | | | | | TWIST LOCK SYSTEM | | |
| | U | | | | | | | | |

Product ordering sample

F126 - L - A - FAC - LED35W - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK