

## F126 LED Series Post Top



### Description

- The F126 Series luminaire shall consist of an cast aluminum hood assembly, an aluminum cage, a multi-panel diffuser, and an internal optical system and a slip fitter (capital)
- The hinged hood, equipped with a cast aluminum finial, shall rest on the cage, which shall consist of eight diffuser panels, cast aluminum struts and a cast aluminum ring mechanically fastened together with stainless steel hardware to the gasketed fitter.
- All electrical components shall be UL listed and labeled.
- Powder coated finish

### Specification

#### Housing

Made from heavy duty cast aluminum to withstand harsh weather.

#### Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

#### Interior Design & Optical


Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.  
L70 at 50,000 hours with CRI 70.

#### Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations. Finish is electrostatically applied with thermoset polyester powder-coat.



## Dimensions

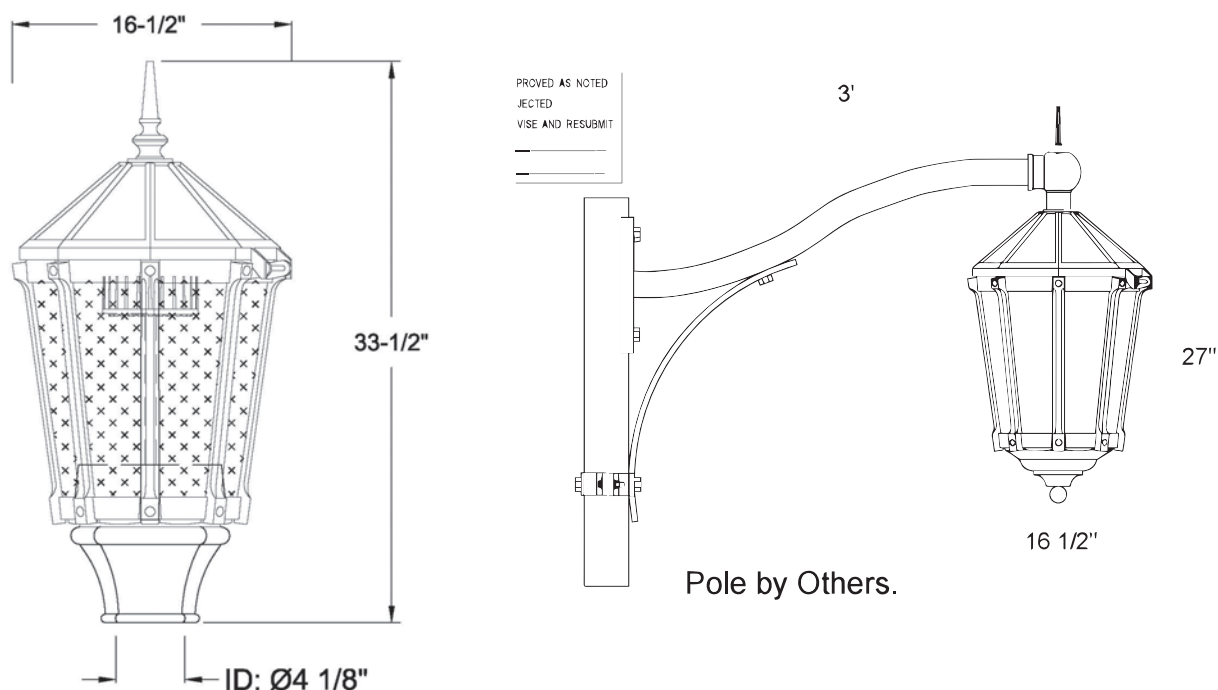

## Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FITTER	FINIALS
F126	Max 12,600 LUMENS	3000K 4000K 5000K 6000K  ±10% Variance	120v-277v  Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	<b>DIM</b> Dimming control <b>PCB</b> Button type photocell <b>HSS</b> House side shield <b>TWL</b> Twist lock system	A, B C, D E, F G, H I, J K, L M, Q R, T U	FA FB FC FD FE FF FG FH FI FJ

### DIFFUSER TYPE

**CAC** Clear Acrylic  
**FAC** Frosted Acrylic  
**WAC** White Acrylic  
**CTG** Clear Tempered Glass  
**CPC** Clear Polycarb  
**WPC** White Polycarb

### Color

Standard RAL  
 6005 Green  
 7012 Grey  
 8019 Bronze  
 9011 Black/Txt  
 9016 White  
 Custom RAL

