

PRODUCT TECHNICAL DATA SHEET

F128-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES

	length	width	height	weight	tenon size	EPA
Large	16.5"	16.5"	33"	32 lbs	3"(W) x 4"(L)	2.30 ft ²
Small	-	-	-	-	-	-


PHOTOMETRICS

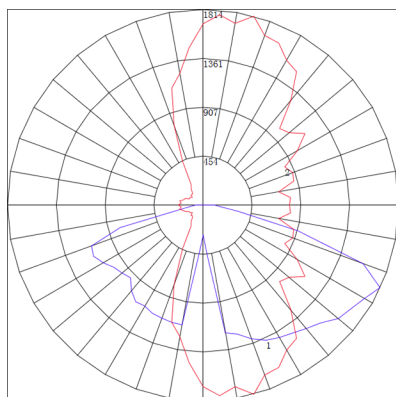

SAMPLE ILLUSTRATION
IES type III, short

◀ polar graph

ISO footcandle ▶

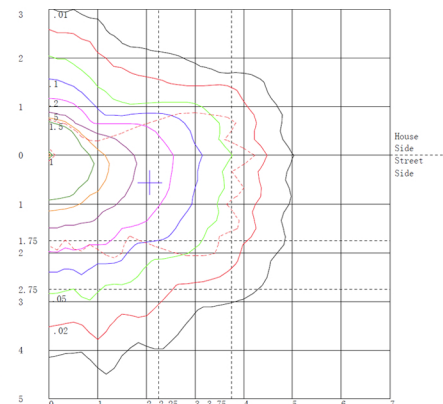

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F128-L	A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	DIM	FA	STANDARD RAL
	B		35W	4000K		II (2)	DIMMING CONTROL	FB	6005 GREEN
	C	CPC CLEAR POLYCARBONATE	50W	5000K	STEP DOWN	III (3)		FC	7012 GREY
	D		55W	6000K	TRANSFORMER	IV (4)	FUS	FD	8019 BRONZE
	E	CTG CLEAR TEMPERED GLASS	70W		347V	V (5)	INTERNAL FUSING	FE	9011 BLACK
	F		80W	± 10% VARIANCE	480V			FF	9016 WHITE
	G	FAC FROSTED ACRYLIC	90W				PCB	FG	*TEXTURE AVAILABLE
	H		120W				BUTTON TYPE PHOTOCELL	FH	
	I	FPC FROSTED POLYCARBONATE						FI	CUSTOM RAL
	J		CUSTOM				PEC	FJ	
	K	WAC WHITE ACRYLIC					TWIST LOCK PHOTOCELL	NONE	
	L								
	Q	WPC WHITE POLYCARBONATE					HSS		
	R						HOUSE SIDE SHIELD		
	T						TWL		
	U						TWIST LOCK SYSTEM		

Product ordering sample

F128 - L - A - CTG - LED35W - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK