


F132-LED SERIES

SPECIFICATIONS



Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

Hardware
All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI $\geq$ 70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	32"	32"	28"	22 lbs	3"(W) x 4"(L)	1.80 ft²
Small	-	-	-	-	-	-

PHOTOMETRICS

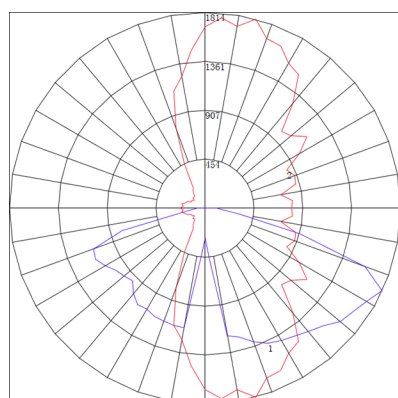

SAMPLE ILLUSTRATION
IES type III, short

◀ polar graph

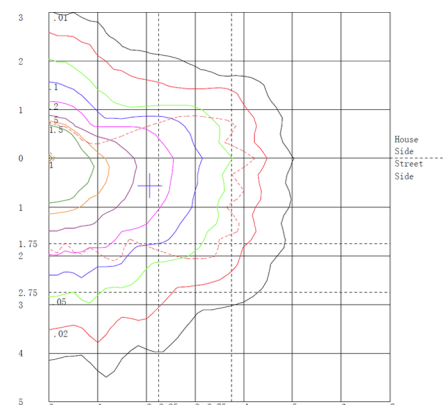

ISO footcandle

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F132-L	N/A	CAC	LED	3000K	120V-277V	IES TYPE	CHY	N/A	STANDARD RAL
		CLEAR ACRYLIC	35W	4000K		II (2)	DECORATIVE CHIMNEY		6005 GREEN
			50W	5000K	STEP DOWN	III (3)		7012 GREY	
		CPC	55W	6000K	TRANSFORMER	IV (4)	DIM		8019 BRONZE
			CLEAR POLYCARBONATE	70W	347V	V (5)	DIMMING CONTROL		9011 BLACK
				80W	± 10% VARIANCE	480V			9016 WHITE
				90W			FUS		*TEXTURE AVAILABLE
				120W			INTERNAL FUSING		
								CUSTOM RAL	
			CUSTOM			PCB			
				BUTTON TYPE PHOTOCCELL					
				HSS					
				HOUSE SIDE SHIELD					
				TWL					
				TWIST LOCK SYSTEM					

Product ordering sample

F132 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK