

# F134-LED SERIES

## SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.  
L70 at 50,000 hours with CRI≥70.


**Exterior Design & Finish**

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.  
Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	26"	26"	25"	22 lbs	3"(W) x 4"(L)	1.50 ft <sup>2</sup>
Small	-	-	-	-	-	-

## PHOTOMETRICS

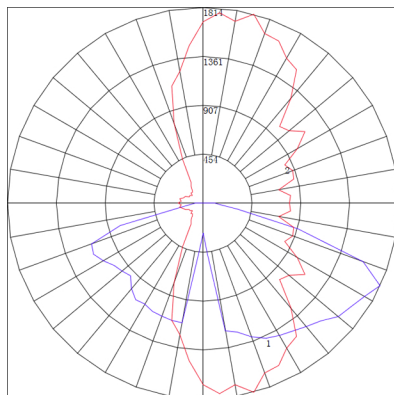

◀ polar graph

**SAMPLE ILLUSTRATION**  
IES type III, short

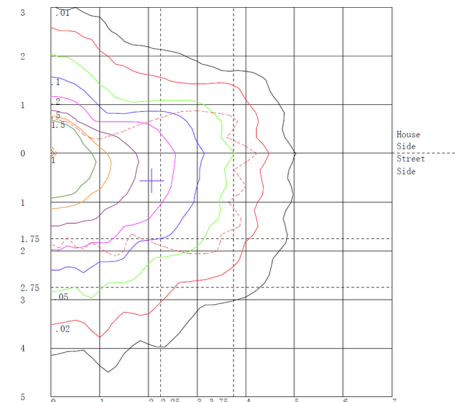

▶ ISO footcandle

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F134-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2) III (3) IV (4) V (5)	CHY DECORATIVE CHIMNEY	N/A	STANDARD RAL 6005 GREEN 7012 GREY 8019 BRONZE 9011 BLACK 9016 WHITE <i>*TEXTURE AVAILABLE</i>
			35W	4000K					
			50W	5000K					
			55W	6000K					
			70W	6000K					
		CPC CLEAR POLYCARBONATE	80W	± 10% VARIANCE	480V	DIM DIMMING CONTROL	FUS INTERNAL FUSING	CUSTOM RAL	
			80W	± 10% VARIANCE	480V				
			90W	± 10% VARIANCE	480V				
									PCB BUTTON TYPE PHOTOCELL
									HSS HOUSE SIDE SHIELD
			TWL TWIST LOCK SYSTEM						

Product ordering sample

F134 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK