

# F143-LED SERIES

## SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.  
L70 at 50,000 hours with CRI≥70.


**Exterior Design & Finish**

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.  
Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	18"	18"	31"	19 lbs	3"(W) x 4"(L)	2.00 ft <sup>2</sup>
Small	-	-	-	-	-	-

## PHOTOMETRICS

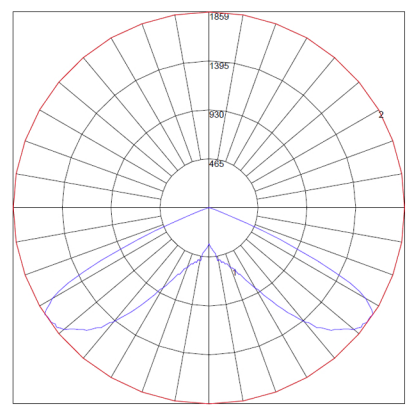

← polar graph

SAMPLE ILLUSTRATION  
IES type III, short

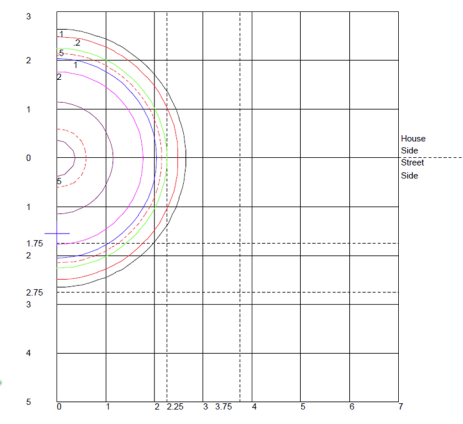

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F143-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	CHY	N/A	STANDARD RAL
		CPC CLEAR POLYCARBONATE	35W	4000K		II (2)	DECORATIVE CHIMNEY		6005 GREEN
		CTG CLEAR TEMPERED GLASS	50W	5000K	III (3)	DIM	DIMMING CONTROL	7012 GREY	
			55W	6000K	IV (4)			8019 BRONZE	
		FAC FROSTED ACRYLIC	70W	± 10% VARIANCE	480V	V (5)	FUS	9011 BLACK	
			80W			9016 WHITE			
		FPC FROSTED POLYCARBONATE	90W	CUSTOM			INTERNAL FUSING	*TEXTURE AVAILABLE	
		WAC WHITE ACRYLIC	120W				PCB	CUSTOM RAL	
WPC WHITE POLYCARBONATE					BUTTON TYPE PHOTOCELL				
					HSS				
					HOUSE SIDE SHIELD				
					TWL				
					TWIST LOCK SYSTEM				

Product ordering sample F143 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK