
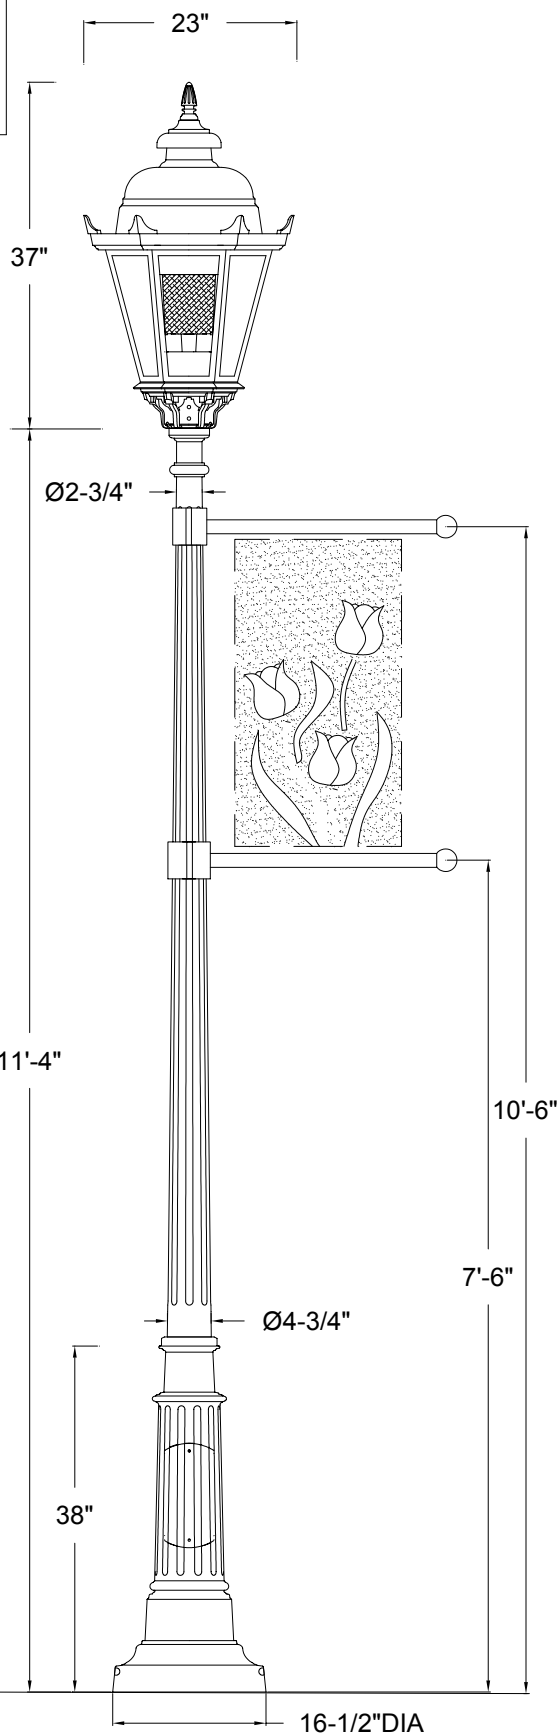


Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By \_\_\_\_\_  
Date \_\_\_\_\_

BOTTOM VIEW

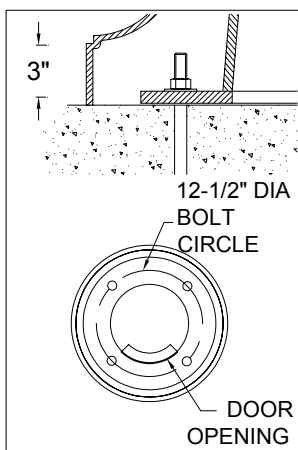

(C) 2001 HCI (Heritage Casting & Ironworks). Illustrations are copyrighted. Unauthorized reproduction prohibited. In an ongoing effort to improve quality/design, Heritage reserves the right to modify specifications without notice.

## Approval Drawing

Light Standard: F146-L-P440-BC

**Diffuser Type:** Clear.

**Diffuser Material:** Tempered glass.

**Optical System:** Prismatic borosilicate glass refractor, with house shield.

**Light distribution:** IES Type III

**Luminaire Housing Material:** Cast and spun aluminum.

**Hood:** Hinged for easy access to lamp and ballast.

**Ballast:** MH high power factor mounted on removable plate. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 150W MH (Pulse Start)  
Voltage - 208V  
Socket - Mogul (4KV).

**Photocontrol:** Luminaire integrated button type photocell 240V.

**Pole:** All cast aluminum.

**Base Cover:** Two-piece cast aluminum attached to pole with stainless steel bolts.

**Anchor Bolts:** 4 galvanized 19mm (3/4") x 610mm (24") long. Bolt Circle 12-1/2"

**Banner Arms:** Made out of 1" round steel tubing. Banners to be removable.

**Finish:** Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

**Colour:** Black Texture.

Date: Apr.12, 2002 Drawing No: 4065  
Model: F146-L-CGL-150MH-208V-BR-L3-HSS-  
- PCB2-L-BA2-P-P440-BC-Black Texture  
Project: University of Pittsburgh

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4  
Tel: (905) 238-2648 Fax: (905) 238-9060  
Toll Free Canada & USA 1-800-267-3175  
E: sales@hclighting.com WEB: www.hclighting.com