

F148 LED Series Post Top



Description

The F148 ?

Specification

Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI ≥ 70 .


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



Dimensions

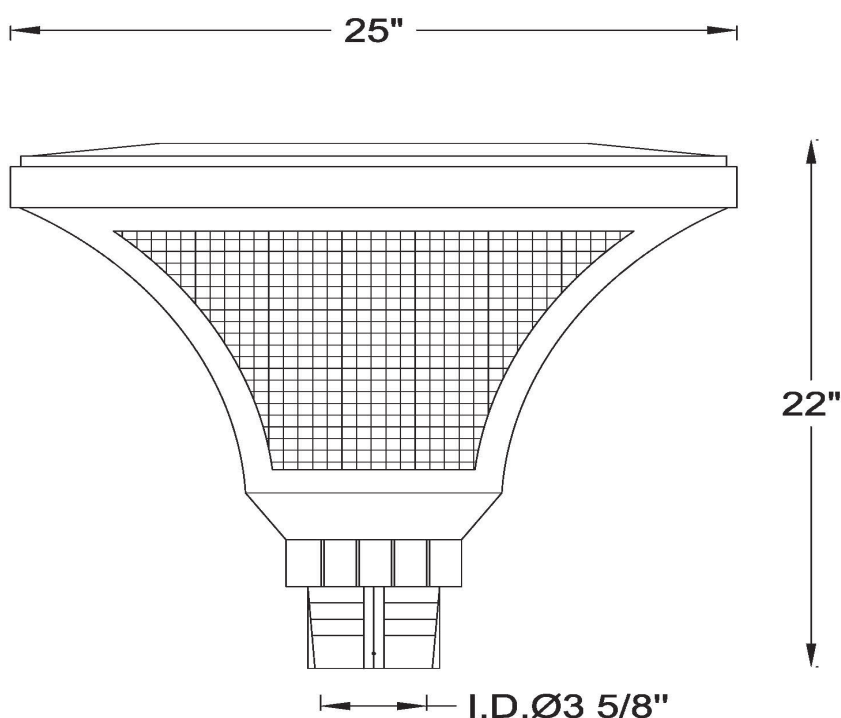

Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FITTER	FINIALS
F148	Max	3000K 4000K 5000K 6000K =10% Vari- ance	120v-277v Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	DIM Dimming control PCB Button type photo- cell HSS House side shield TWL Twist lock system	N/A	N/A

DIFFUSER TYPE

CACX Clear acrylic textured
CPCX Clear polycarbonate
 textured
FACX Frosted acrylic textured
WACX White acrylic textured

Color

Standard RAL
 6005 Green
 7012 Grey
 8019 Bronze
 9011 Black/Txt
 9016 White

 Custom RAL

