

## PRODUCT TECHNICAL DATA SHEET

## F151-LED SERIES

## SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES

	length	width	height	weight	tenon size	EPA
Large	19"	19"	37"	44 lbs	3"(W) x 4"(L)	3.00 ft <sup>2</sup>
Medium	16"	16"	33"	36 lbs	3"(W) x 4"(L)	2.00 ft <sup>2</sup>
Small	14"	14"	29"	28 lbs	3"(W) x 4"(L)	1.95 ft <sup>2</sup>


## PHOTOMETRICS

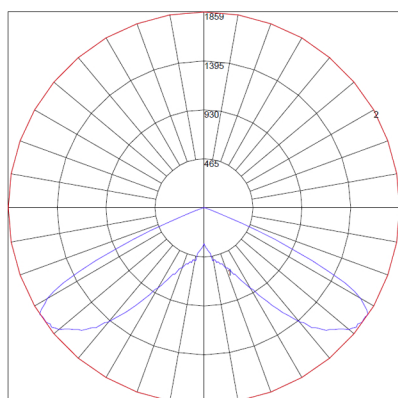

**SAMPLE ILLUSTRATION**  
IES type III, short

← polar graph

ISO footcandle →

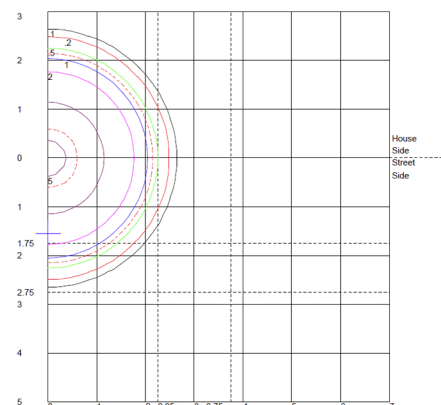

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F151-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	CHY DECORATIVE CHIMNEY	N/A	STANDARD RAL
F151-M		CPC CLEAR POLYCARBONATE	35W	4000K		II (2)			6005 GREEN
F151-S		CTG CLEAR TEMPERED GLASS	50W	5000K	STEP DOWN TRANSFORMER	III (3)	DIM DIMMING CONTROL		7012 GREY
		FAC FROSTED ACRYLIC	55W	6000K	347V	IV (4)	FUS INTERNAL FUSING		8019 BRONZE
		FPC FROSTED POLYCARBONATE	70W		480V	V (5)	PCB BUTTON TYPE PHOTOCELL		9011 BLACK
		WAC WHITE ACRYLIC	80W	± 10% VARIANCE			PEC TWIST LOCK PHOTOCELL		9016 WHITE
		WPC WHITE POLYCARBONATE	90W				HSS HOUSE SIDE SHIELD		*TEXTURE AVAILABLE
			120W				TWL TWIST LOCK SYSTEM		CUSTOM RAL
			CUSTOM						

Product ordering sample

F151 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK