

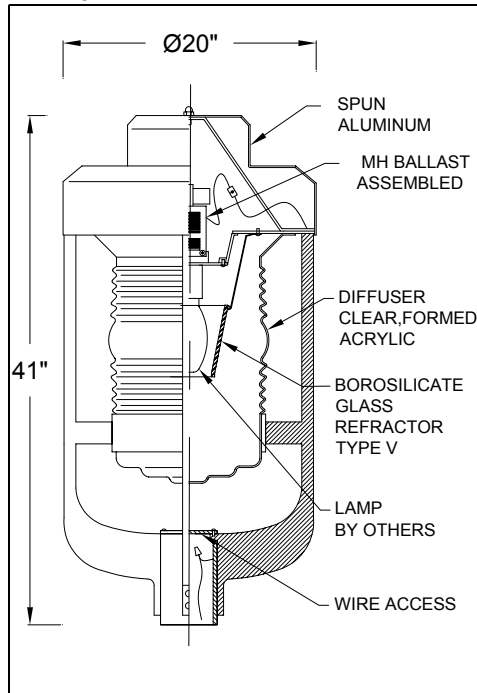


LUMINAIRE DETAIL VIEW

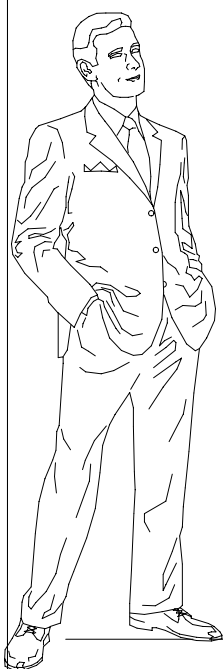

POLE (12FT, 80mph) = 13.75 sq ft
Luminaire+Arm (60lbs) = 5.10 sq ft

BOTTOM VIEW



Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI

☐ APPROVED


☐ APPROVED AS NOTED

☐ REJECTED

☐ REVISE AND RESUBMIT

By _____

Date _____

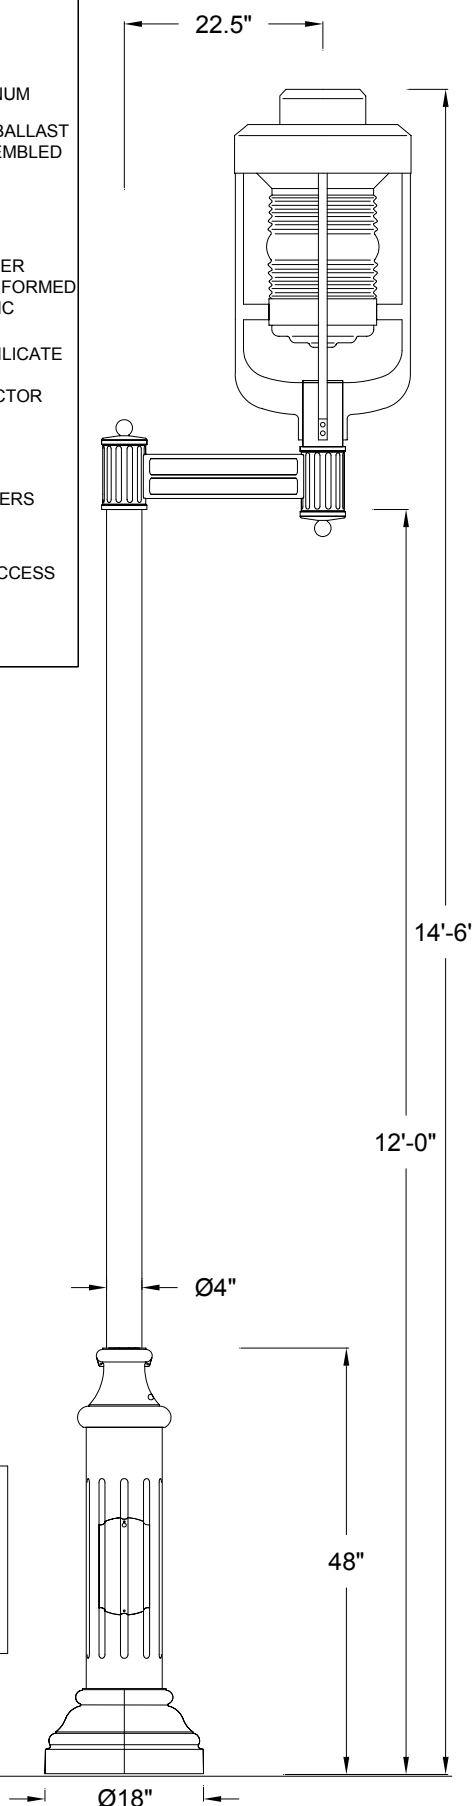

Approval Drawing

Light Std: F157-L- A317-1A -P410-4P

Diffuser Type: Clear

Diffuser Material: Polycarbonate
U.V. stabilized.

Optical System: Borosilicate glass refractor. IES Type V.

Top Cap: Spun aluminum, removable for easy maintenance.

Diffuser Holder Material: Four cast aluminum struts.

Ballast: MH high power factor mounted on removable plate. A quick disconnect wiring system allows for fast easy ballast and lamp maintenance. Lamp not included.

Wattage - 175W

Voltage - 120V (QT)

Socket - Mogul (4KV).

Arm: Cast aluminum

Arm Configuration: 1A

Pole: 4" O.D. x .226 wall 6061 T6 aluminum extrusion tube welded over and in a 8.5" dia cast aluminum base with 8"W x 7.75"H service door.

Base Cover: Two piece attached to pole with four stainless steel screws.

Anchor bolts: 4 galvanized 19mm (3/4") x 610 mm (24") long. A steel bolt circle template is supplied by HCI

Finish: Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.

Colour: Black RAL # 9011 - (8) POLES
Bronze RAL # 8015 - (8) POLES

Date: Mar.13, 2003 Drawing No: 4339

Model: F157-L-CPC-175MH-120V-BR-5-
-A317-1A- P410-4P-12

Project: KENNYWOOD PARK 02-19

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA 1-800-267-3175
E: sales@hclighting.com WEB: www.hclighting.com