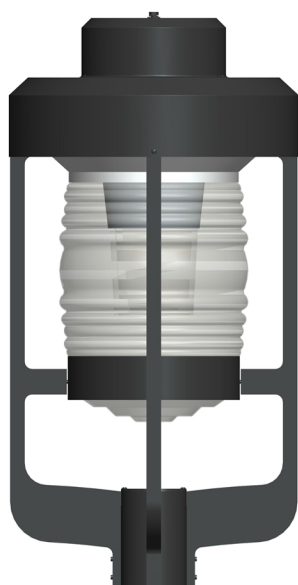


PRODUCT TECHNICAL DATA SHEET

F157-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES

	length	width	height	weight	tenon size	EPA
Large	20"	20"	41"	45 lbs	3"(W) x 4"(L)	3.90 ft ²
Small	-	-	-	-	-	-


PHOTOMETRICS

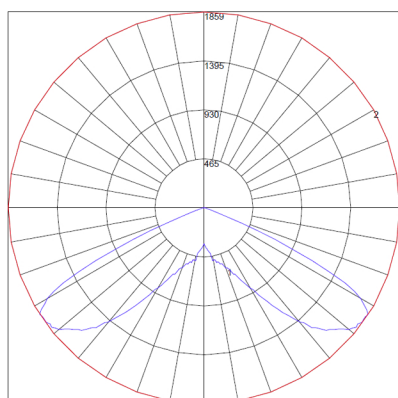

SAMPLE ILLUSTRATION
IES type III, short

← polar graph

ISO footcandle →

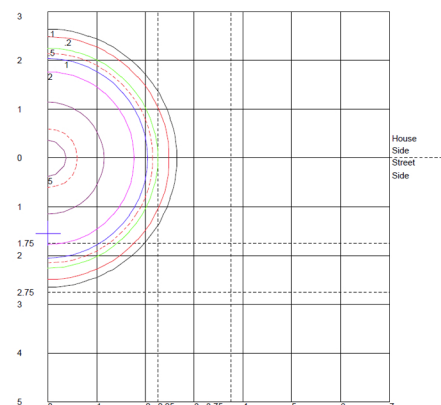

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F157-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	CHY DECORATIVE CHIMNEY	N/A	STANDARD RAL 6005 GREEN 7012 GREY 8019 BRONZE 9011 BLACK 9016 WHITE *TEXTURE AVAILABLE CUSTOM RAL
			35W	4000K		II (2)			
		CPC CLEAR POLYCARBONATE	50W	5000K	STEP DOWN	III (3)			
			55W	6000K	TRANSFORMER	IV (4)	DIM DIMMING CONTROL		
			70W		347V	V (5)			
			80W	± 10% VARIANCE	480V		FUS INTERNAL FUSING		
			90W				PCB BUTTON TYPE PHOTOCELL		
			120W				HSS HOUSE SIDE SHIELD		
							TWL TWIST LOCK SYSTEM		
			CUSTOM						

Product ordering sample

F157 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK