

PRODUCT TECHNICAL DATA SHEET

F162-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI \geq 70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	18"	18"	41"	41 lbs	3"(W) x 4"(L)	2.20 ft ²
Small	-	-	-	-	-	-

PHOTOMETRICS

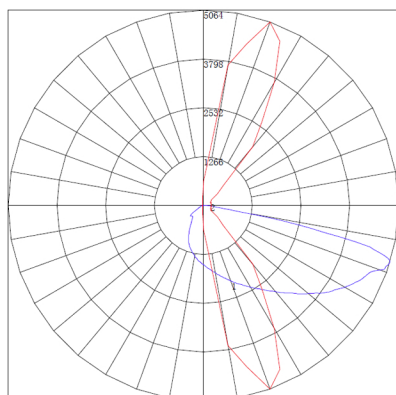

SAMPLE ILLUSTRATION
IES type III, medium

← polar graph

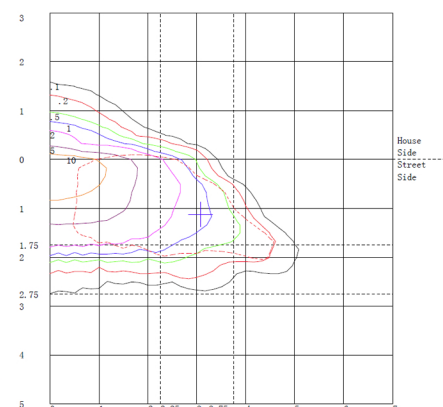

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F162-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2) III (3) IV (4) V (5)	CHY DECORATIVE	FA	STANDARD RAL
			35W	4000K	CHIMNEY		FB	6005 GREEN	
			50W	5000K	STEP DOWN TRANSFORMER		FC	7012 GREY	
			55W	6000K			FD	8019 BRONZE	
			70W	347V			FE	9011 BLACK	
		80W	± 10% VARIANCE	480V	FUS INTERNAL FUSING		FF	9016 WHITE	
		90W		PCB BUTTON TYPE PHOTOCELL	FG		*TEXTURE AVAILABLE		
		120W			FH		CUSTOM RAL		
		CUSTOM	FI						
			FJ						
				PEC TWIST LOCK PHOTOCELL	NONE				
						HSS HOUSE SIDE SHIELD			
						TWL TWIST LOCK SYSTEM			

Product ordering sample

F162 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK