

F162 LED Series Pendant



Description

The F162 Series luminaire shall consist of an injection-molded UV stabilized diffuser, a spun aluminum hinged hood assembly with a decorative spun copper cupola, an aluminum cage, an internal optical system and a mechanically fastened slip fitter (capital). The aluminum cage shall consist of four cast aluminum ornamental struts and a cast aluminum ring mechanically fastened together. The cage shall be secured to the gasketed cast aluminum fitter with stainless steel hardware. The fitter shall house a LED assembly. The LED assembly shall feature quick disconnect plugs for easy maintenance. The LED shall be factory wired, tested and mounted on a keyholed cast aluminum plate

Specification

Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI 70.


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



Dimensions

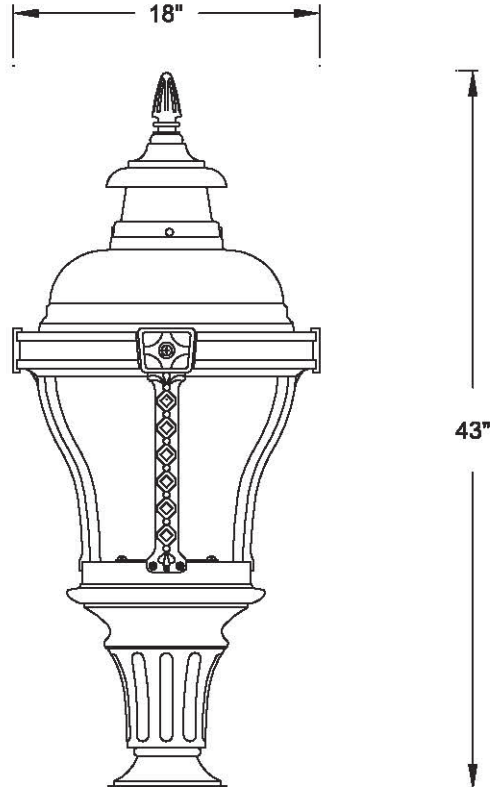

Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FITTER	FINIALS
F162	Max 15,750 LUMENS	3000K 4000K 5000K 6000K =10% Variance	120v-277v Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	DIM Dimming control PCB Button type photocell HSS House side shield TWL Twist lock system	A, B C, D E, F G, H I, J K, L M, Q R, T U	FA FB FC FD FE FF FG FH FI FJ

DIFFUSER TYPE

- CPCX** Clear polycarbonate textured
- FACX** Frosted acrylic textured
- CACX** Clear acrylic textured
- WACX** White acrylic textured

Color

- Standard RAL
- 6005 Green
- 7012 Grey
- 8019 Bronze
- 9011 Black/Txt
- 9016 White
- Custom RAL

