

## F172 LED Series Pendant



### Description

The F172 Series luminaire shall consist of an injection-molded UV stabilized diffuser, a spun aluminum shade assembly, an aluminum cage and an internal optical system. The aluminum cage shall consist of four extruded aluminum struts and a cast aluminum ring welded together. The diffuser shall be secured to the gasketed fitter with stainless steel hardware.

The LED shall feature quick disconnect plugs for easy maintenance. The LED shall be factory wired, tested and mounted on a keyholed cast aluminum plate.

### Specification

#### Housing

Made from heavy duty cast aluminum to withstand harsh weather.

#### Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

#### Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI 70.


#### Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



## Dimensions

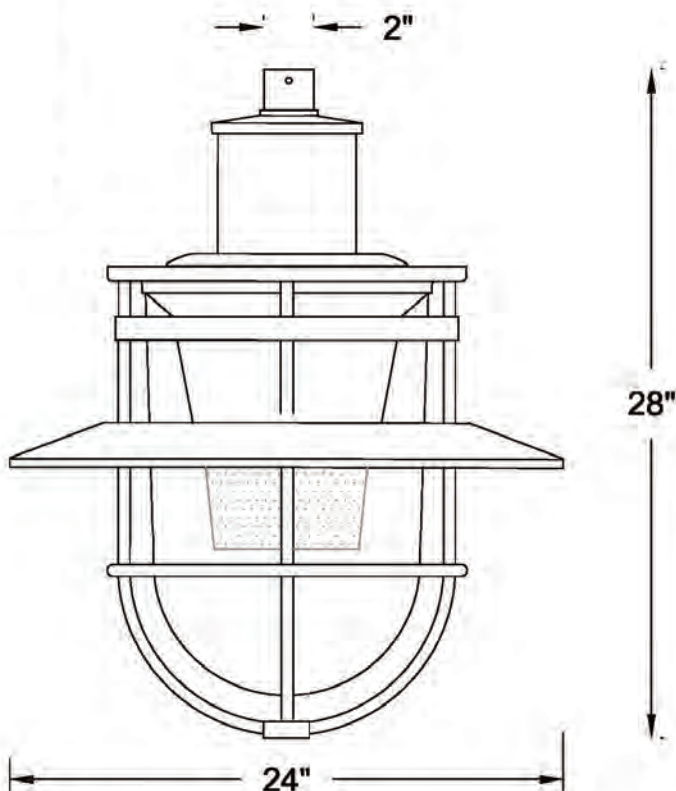

## Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FITTER	FINIALS
F172	Max 12,600 LUMENS	3000K 4000K 5000K 6000K  ±10% Variance	120v-277v  Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	<b>DIM</b> Dimming control <b>PCB</b> Button type photocell <b>HSS</b> House side shield <b>TWL</b> Twist lock system	A, B C, D E, F G, H I, J K, L M, Q R, T U	FA FB FC FD FE FF FG FH FI FJ

### DIFFUSER TYPE

**CPC** Clear polycarbonate  
**WPC** White polycarbonate

### Color

Standard RAL  
 6005 Green  
 7012 Grey  
 8019 Bronze  
 9011 Black/Txt  
 9016 White  
 Custom RAL

