


Approval Drawing

Light Standard: F174-L Series



292mm (11-1/2")
Bolt Circle

519cm
(17')
488cm
(16')
458cm
(15')
428cm
(14')
397cm
(13')
366cm
(12')
335cm
(11')
305cm
(10')
274cm
(9')
244cm
(8')
213cm
(7')
183cm
(6')
152cm
(5')
122cm
(4')
91cm
(3')
61cm
(2')
30cm
(1')

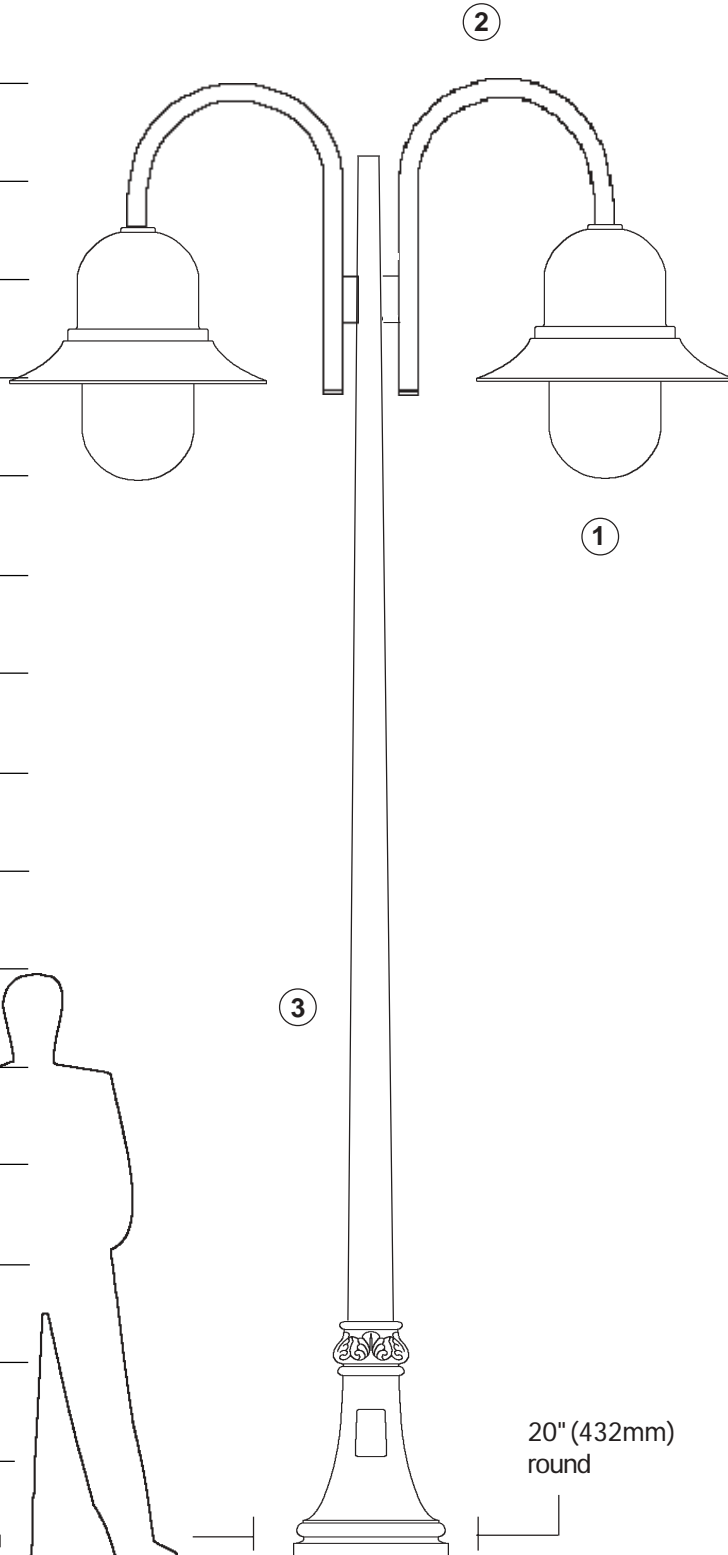

- 1 Diffuser Type:** Clear
Diffuser Material: Polycarbonate U.V. stabilized.
Diffuser Fitter Material: Cast aluminum with quarter-turn twist-lock system for easy service access.
Hardware: Stainless steel.
Lamp: MH (lamp by others)
Ballast: High power factor, mounted on a removable plate in the luminaire.
Wattage: 250W
Voltage: 120V
Socket Type: Mogul porcelain
Optical System: Prismatic heat resistant borosilicate glass refractor
Light Distribution: IES Type III
- 2 Arm Material:** Extruded aluminum .125" (3mm) thick.
Configuration: 2A
- 3 Pole Material:** Extruded tapered aluminum .225" (6mm) thick.
Base Cover Material: One piece cast aluminum.
Anchor Bolts: 4 galvanized 3/4" (19mm) x 24" (610mm) long. Anchor bolts and metal template are supplied by HCI.
- 4 Finish:** Electrostatically applied, thermoset polyester powder-coat finish with XL4 four part corrosion inhibiting process.
- 5 Color:** To be specified.

Date: 10/02/00

Drawing No: 2804

Model: F174-L-CPC-250MH-120V-BR-S3-A359-2A-P454-54T-12-Color

Project: Cornerstone Baptist Church

Approved as illustrated: Date:

Approved with changes: Date:

Approved By:

Notes:

Please Note: fabrication will not begin until this drawing is approved, signed and returned to HCI.



HCI

Heritage Casting & Ironworks

1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
Tel: (905) 238-2648 Fax: (905) 238-9060
Toll Free Canada & USA: 1-800-267-3175
sales@hcilighting.com www.hcilighting.com