


F177 SERIES LUMINAIRE



HCI
Heritage Casting & Ironworks

1280 Fewster Drive
Mississauga ON L4W 1A4
sales@hcilighting.com
www.hcilighting.com
Fax (905) 238-9060

Toll-free (800) 267-3175 Tel. (905) 238-2648

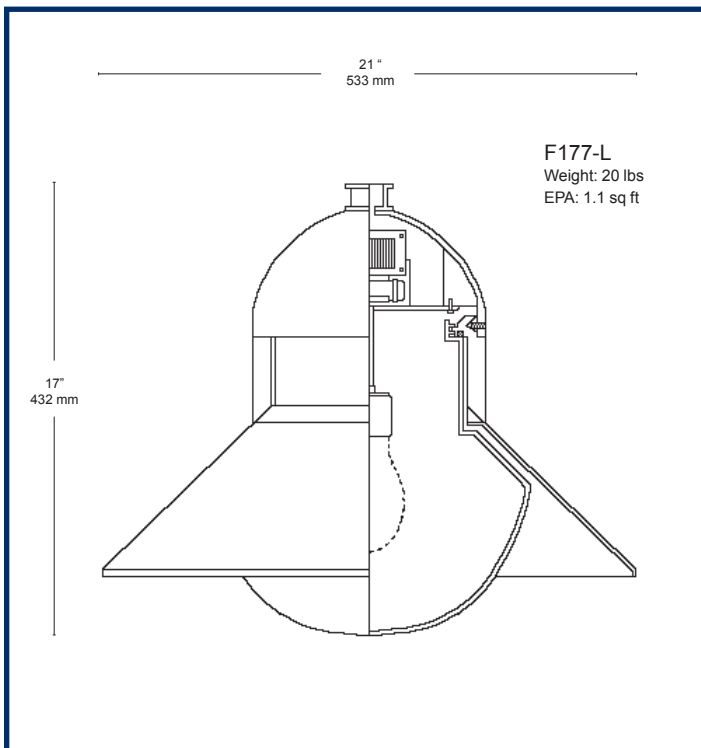

Description. The F177 Series luminaire shall consist of an injection-molded UV stabilized diffuser, a spun aluminum shade assembly and a cast aluminum upper body. The diffuser shall be secured to the upper body with stainless steel hardware. The ballast shall feature quick disconnect plugs for easy ballast maintenance. The ballast shall be factory wired, tested and mounted on a keyholed cast aluminum plate together with a 4kV porcelain socket. Lamps are not included and shall be supplied by others. All electrical components shall be UL listed and labeled.

Installation. The fixture shall be equipped with either a 2" OD or 3-1/2" OD tenon and shall be secured to an arm with three hex socket screws spaced 120° apart and a security bolt. Order arm separately.

Finish. All applicable parts shall receive a standard electrostatically applied thermoset polyester powder coat smooth semi gloss finish with a four part corrosion inhibiting process.

To assemble a catalog number, list all codes sequentially.

1. SIZE

F177-L (21"W x 17"H)

2. DIFFUSER TYPE

FPE Frosted Polyethylene

WPE White Polyethylene

3. LIGHT SOURCE (indicate wattage)

50 - 100 MH _____ W

Option: pulse start ballast

35 - 100 HPS _____ W

CFL Fluorescent _____ W

INC Incandescent _____ W

4. VOLTAGE

QT (Quad Tap 120, 208, 240, 277)

TT (Tri Tap 120, 277, 347)

NOTE: Please circle connected voltage. If none is indicated, factory will pre-wire at 120V.

120V Reactor

480 Single

5. OPTICS

BL bare lamp

For more information on optical systems, see *Options* section. Photometrics are also available in IES format - consult factory or your HCI sales representative.

6. OPTIONS

FUS internal fusing

PCB luminaire integrated button type photocell

HSS house side shield

7. COLOR

Black RAL 9011

Green RAL 6005

Bronze RAL 8019

Grey RAL 7012

White RAL 9016

Custom