

PRODUCT TECHNICAL DATA SHEET

F179-LED SERIES

SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES

	length	width	height	weight	tenon size	EPA
Large	21"	21"	26"	23 lbs	3"(W) x 4"(L)	2.40 ft ²
Small	-	-	-	-	-	-


PHOTOMETRICS

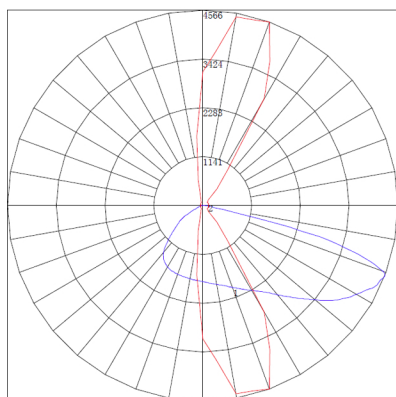

SAMPLE ILLUSTRATION
IES type II, medium

◀ polar graph

ISO footcandle ▶

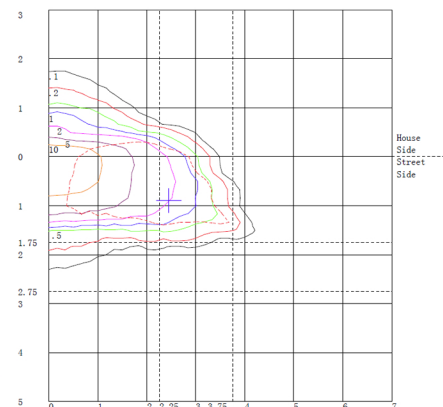

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F179-L	N/A	CAC	LED	3000K	120V~277V	IES TYPE	DIM	N/A	STANDARD RAL
		CLEAR ACRYLIC	35W	4000K		II (2)	DIMMING CONTROL		
			50W	5000K	STEP DOWN	III (3)			
		CPC	55W	6000K	TRANSFORMER	V (5)	FUS		
		CLEAR POLYCARBONATE	70W		347V		INTERNAL FUSING		
			80W	± 10% VARIANCE	480V				
		WAC	90W				PCB		*TEXTURE AVAILABLE
		WHITE ACRYLIC	120W				BUTTON TYPE PHOTOCELL		
		WPC					HSS		CUSTOM RAL
		WHITE POLYCARBONATE	CUSTOM				HOUSE SIDE SHIELD		
							TWL		
							TWIST LOCK SYSTEM		

Product ordering sample

F179 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - DIM - RAL9011 BLACK