

# F197-LED SERIES

## SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	20"	20"	33.5"	48 lbs	3"(W) x 4"(L)	3.30 ft <sup>2</sup>
Small	-	-	-	-	-	-

## PHOTOMETRICS

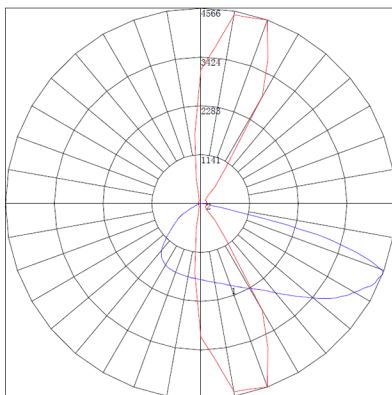

← polar graph

SAMPLE ILLUSTRATION  
IES type II, medium

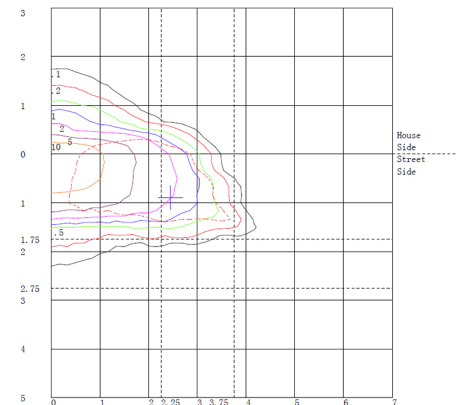

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F197-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2)	CHY DECORATIVE CHIMNEY	N/A	STANDARD RAL
		CPC CLEAR POLYCARBONATE	35W	4000K			6005 GREEN		
		CTG CLEAR TEMPERED GLASS	50W	5000K	7012 GREY				
			55W	6000K	8019 BRONZE				
		FAC FROSTED ACRYLIC	70W	± 10% VARIANCE	9011 BLACK				
			80W		9016 WHITE				
		FPC FROSTED POLYCARBONATE	90W	CUSTOM	*TEXTURE AVAILABLE				
		SAC STIPPLE ACRYLIC	120W		CUSTOM RAL				
		SPC STIPPLE POLYCARBONATE							
		WAC WHITE ACRYLIC							
WPC WHITE POLYCARBONATE									

Product ordering sample

F197 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK