


Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI


- APPROVED
- APPROVED AS NOTED
- REJECTED
- REVISE AND RESUBMIT

By _____
Date _____

ARM MOUNTING PLATE DETAIL

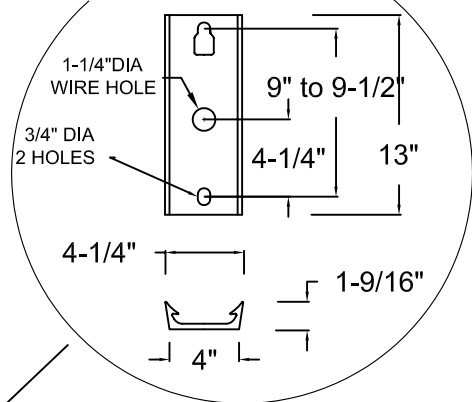

The mounting arm bracket is assembled to the pole with two bolts.
(BY OTHERS)

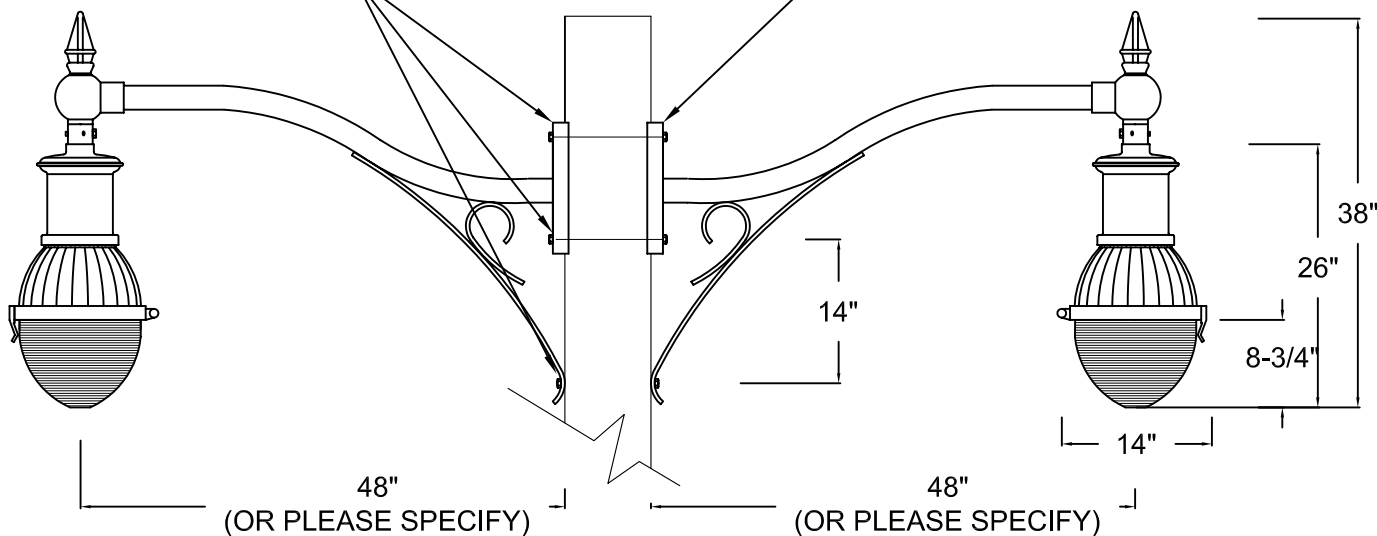

(C) 2005 HCI (Heritage Casting & Ironworks). Illustrations are copyrighted. Unauthorized reproduction prohibited. In an ongoing effort to improve quality/design, Heritage reserves the right to modify specifications without notice.

Diffuser Type: Clear External Prismatic

Diffuser Material: Acrylic U.V. stabilized.

Hardware: Stainless steel.

Luminaire Housing: The hood shall be made of multifaceted bright anodized aluminum reflector. The hinged diffuser shall be for easy access to lamp and ballast.

Ballast: HPS high power factor mounted on removable plate. A quick disconnect wiring system allows for fast easy ballast maintenance.

Wattage - 70W

Voltage - QT (PLEASE SPECIFY)

Socket - Medium (4KV).

Photocontrol: None

Optical System: Prismatic acrylic refractor with highly polished anodized reflector.

Light Distribution: IES Type V

Arm: Made of 60mm(2-3/8") by 5mm(3/16") aluminum tube and 38mm(1-1/2") by 6mm(1/4") aluminum flat bar.

Wall Plate Material: Aluminum extrusion channel. (SEE MOUNTING PLATE DETAIL)

Tenon: 2" O.D. X 2"H

Finish: Electrostatically applied thermoset polyester powder-coat with the XL4 four part corrosion inhibiting process.

Colour: Black RAL # 9011

Approval Drawing

Luminaire: F206-L- A377-2A-48

Date: Sep.28, 2005 Drawing No: 4595
 Model: F206-L-70HPS-(QT)VOLT-BL-5 - A377-2A-48-
 - RAL9011

Project: Excelsior And Grand

Please Note: Fabrication will not begin until this drawing is approved, signed and returned to HCI



1280 Fewster Drive, Mississauga, Ontario, Canada L4W 1A4
 Tel: (905) 238-2648 Fax: (905) 238-9060
 Toll Free Canada & USA 1-800-267-3175
 E: sales@hclighting.com WEB: www.hclighting.com