

## F207-LED SERIES

### SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.  
L70 at 50,000 hours with CRI≥70.


**Exterior Design & Finish**

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.  
Finish is electrostatically applied with thermoset polyester powder-coat.


### SIZES

	length	width	height	weight	tenon size	EPA
Large	30"	30"	30.5"	46 lbs	3"(W) x 4"(L)	2.60 ft <sup>2</sup>
Small	-	-	-	-	-	-

### PHOTOMETRICS

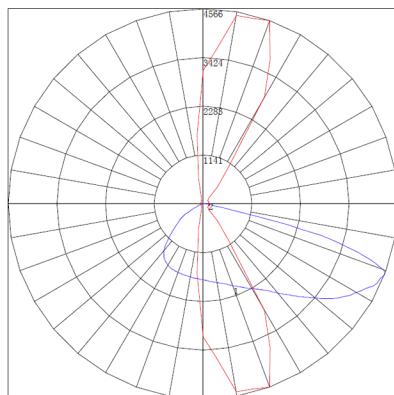

SAMPLE ILLUSTRATION  
IES type II, medium

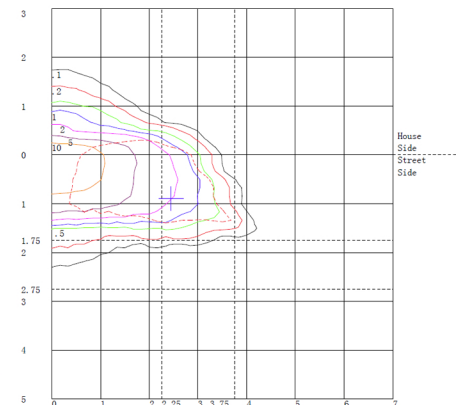

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F207-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2) III (3) IV (4) V (5)	DIM DIMMING CONTROL	N/A	STANDARD RAL 6005 GREEN 7012 GREY 8019 BRONZE 9011 BLACK 9016 WHITE *TEXTURE AVAILABLE
			35W	4000K					
			50W	5000K					
			55W	6000K					
			70W	± 10% VARIANCE					
		80W	480V	STEP DOWN TRANSFORMER 347V	FUS INTERNAL FUSING				
		90W							
		120W							
		CUSTOM						CUSTOM RAL	
							PCB BUTTON TYPE PHOTOCELL		
							HSS HOUSE SIDE SHIELD		
							TWL TWIST LOCK SYSTEM		

Product ordering sample

F207 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - DIM - RAL9011 BLACK