

F214-LED SERIES

SPECIFICATIONS



Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

Exterior Design & Finish


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	16"	16"	24"	21 lbs	3"(W) x 4"(L)	1.65 ft ²
Small	-	-	-	-	-	-

PHOTOMETRICS

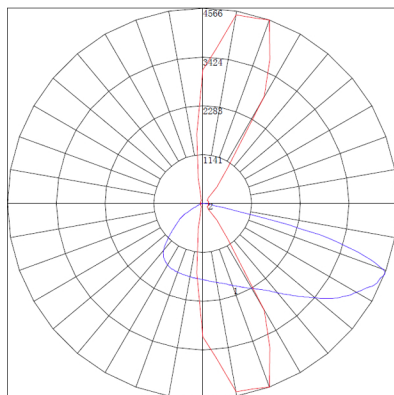

← polar graph

SAMPLE ILLUSTRATION
IES type II, medium

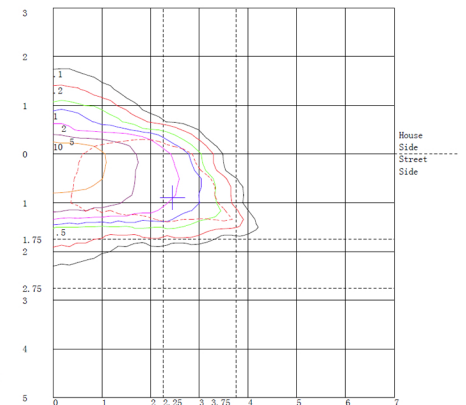

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR	
F214-L	N/A	CAC	LED	3000K	120V~277V	IES TYPE II (2)	DIM DIMMING CONTROL	N/A	STANDARD RAL	
		CLEAR ACRYLIC	35W	4000K						
		CPC	50W	5000K	STEP DOWN TRANSFORMER	III (3)	FUS INTERNAL FUSING			6005 GREEN
			CLEAR POLYCARBONATE	55W	6000K	347V				IV (4)
		WAC	70W	± 10% VARIANCE	480V	V (5)	PCB BUTTON TYPE PHOTOCELL			8019 BRONZE
			90W							9011 BLACK
WPC	120W	CUSTOM			HSS HOUSE SIDE SHIELD	9016 WHITE				
WHITE POLYCARBONATE					TWL TWIST LOCK SYSTEM	*TEXTURE AVAILABLE	CUSTOM RAL			

Product ordering sample

F214 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - DIM - RAL9011 BLACK