

F215 LED Series Post Top



Description

- Ornamental heavy gauge cast aluminum base
- Quick disconnect ballast system mounted on removable plate
- Integrated button photocell optional
- Suitable for wet locations
- E39 mogul base or E26 medium base optional
- Powder coated finish

Specifications

Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance. L70 at 50,000 hours with CRI ≥ 70 .


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.


Finish is electrostatically applied with thermoset polyester powder-coat.




Dimensions

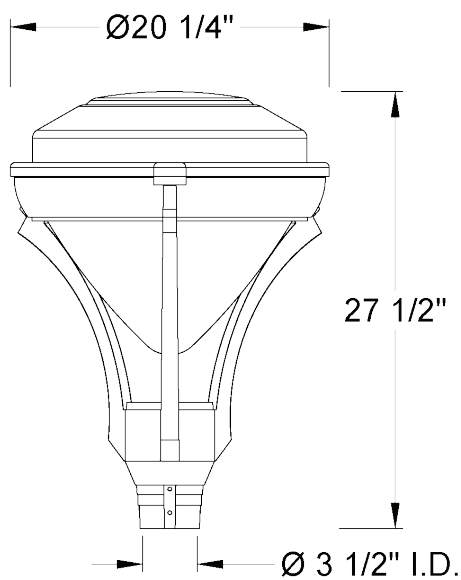

Without diffuser

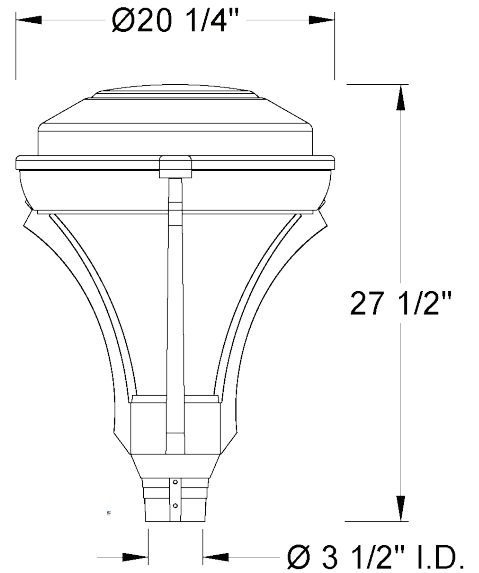


Photometric

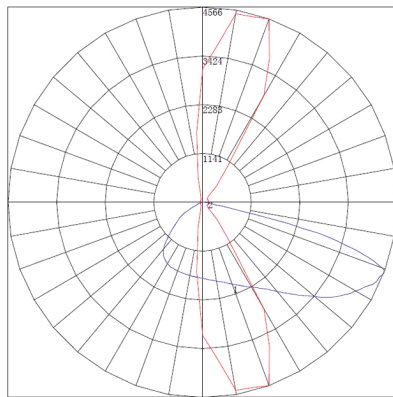

◀ polar graph

SAMPLE ILLUSTRATION
IES type II, medium

ISO footcandle ▶▶

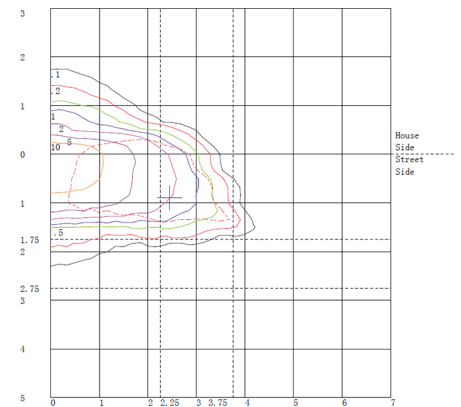

Product Ordering Number

PRODUCT	FITTER	DIFFUSER TYPE	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F215-L	N/A	CAC CLEAR ACRYLIC CPC CLEAR POLYCARBONATE CTG CLEAR TEMPERED GLASS FAC FROSTED ACRYLIC FPC FROSTED POLYCARBONATE WAC WHITE ACRYLIC WPC WHITE POLYCARBONATE	Max 26,500 CUSTOM	3000K 4000K 5000K 6000K =10% Variance	120v-277v Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	DIM Dimming control PCB Button type photocell HSS House side shield	N/A	Standard RAL 6005 Green 7012 Grey 8019 Bronze 9011 Black 9016 White *Texture Available* Custom RAL