


F302-LED SERIES

SPECIFICATIONS



Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.
L70 at 50,000 hours with CRI≥70.


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.
Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	32"	32"	28"	18 lbs	3"(W) x 4"(L)	0.95 ft ²
Small	-	-	-	-	-	-

PHOTOMETRICS

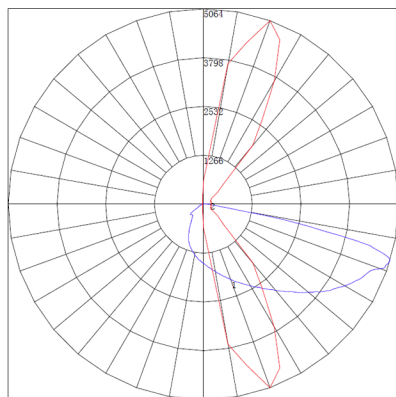

← polar graph

SAMPLE ILLUSTRATION
IES type III, medium

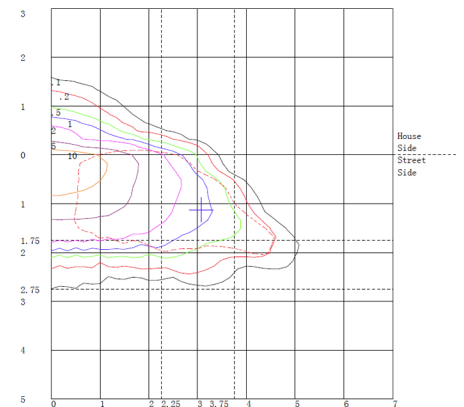

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F302-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2)	DIM DIMMING CONTROL	N/A	STANDARD RAL
		CPC CLEAR POLYCARBONATE	35W	4000K		III (3)			6005 GREEN
		CTG CLEAR TEMPERED GLASS	50W	5000K	STEP DOWN TRANSFORMER	IV (4)	FUS INTERNAL FUSING		7012 GREY
		FAC FROSTED ACRYLIC	55W	6000K	347V	V (5)			8019 BRONZE
		FPC FROSTED POLYCARBONATE	70W	± 10% VARIANCE	480V		PCB BUTTON TYPE PHOTOCELL		9011 BLACK
		WAC WHITE ACRYLIC	80W				HSS HOUSE SIDE SHIELD		9016 WHITE
		WPC WHITE POLYCARBONATE	90W				TWL TWIST LOCK SYSTEM		*TEXTURE AVAILABLE
			120W	CUSTOM					CUSTOM RAL

Product ordering sample

F302 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - DIM - RAL9011 BLACK