

## PRODUCT TECHNICAL DATA SHEET

## F361-LED SERIES

## SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
Large	17"	17"	28"	28 lbs	3"(W) x 4"(L)	2.20 ft <sup>2</sup>
Small	-	-	-	-	-	-

## PHOTOMETRICS

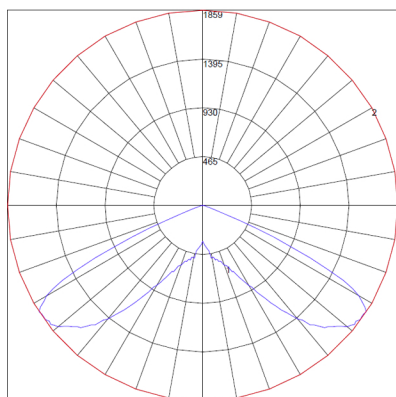

**SAMPLE ILLUSTRATION**  
IES type V, short

← polar graph

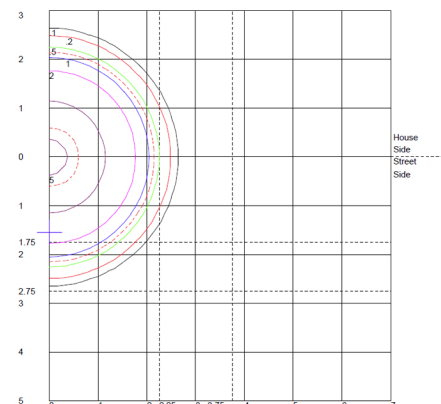

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F361-L	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	CHY	FA	STANDARD RAL
			35W	4000K		II (2)	DECORATIVE CHIMNEY	FB	6005 GREEN
		CPC CLEAR POLYCARBONATE	50W	5000K	STEP DOWN	III (3)		FC	7012 GREY
			55W	6000K	TRANSFORMER	IV (4)	DIM	FD	8019 BRONZE
		CTG CLEAR TEMPERED GLASS	70W		347V	V (5)	DIMMING CONTROL	FE	9011 BLACK
			80W	± 10% VARIANCE	480V			FF	9016 WHITE
		FAC FROSTED ACRYLIC	90W				FUS	FG	*TEXTURE AVAILABLE
			120W				INTERNAL FUSING	FH	
		FPC FROSTED POLYCARBONATE						FI	CUSTOM RAL
		SAC STIPPLE ACRYLIC	CUSTOM				PCB	FJ	
							BUTTON TYPE PHOTOCELL	NONE	
		SPC STIPPLE POLYCARBONATE					HSS		
		WAC WHITE ACRYLIC					HOUSE SIDE SHIELD		
		WPC WHITE POLYCARBONATE					TWL		
							Twist Lock System		

Product ordering sample

F361 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK