

**F362-LED SERIES**

SPECIFICATIONS



**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	12"	12"	19"	18 lbs	3"(W) x 4"(L)	1.10 ft <sup>2</sup>
Small	-	-	-	-	-	-

PHOTOMETRICS

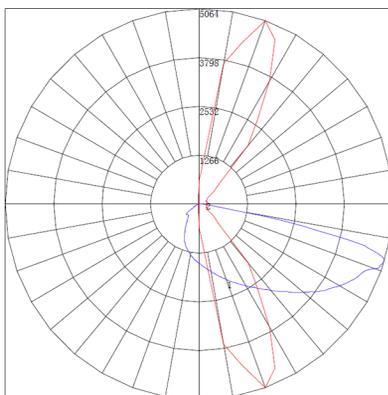

← polar graph

**SAMPLE ILLUSTRATION**  
IES type III, medium

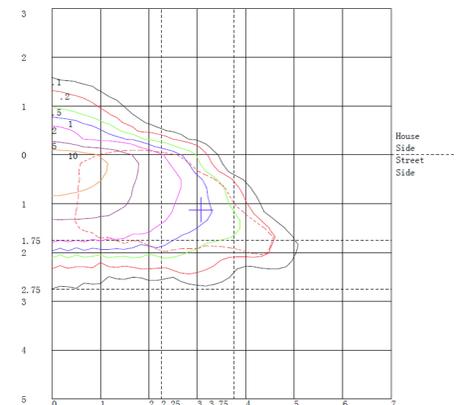

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR	
F362-L	N/A	CAC	LED	3000K	120V~277V	IES TYPE II (2)	DIM DIMMING CONTROL	N/A	STANDARD RAL	
		CLEAR ACRYLIC	35W	4000K						
		CPC	50W	5000K	STEP DOWN TRANSFORMER	IV (4)	FUS INTERNAL FUSING			9011 BLACK
			CLEAR POLYCARBONATE	55W	6000K					
		WAC	70W	± 10% VARIANCE	480V	V (5)	PCB BUTTON TYPE PHOTOCELL			*TEXTURE AVAILABLE
		WHITE ACRYLIC	80W							
WPC	CUSTOM				HSS HOUSE SIDE SHIELD	CUSTOM RAL				
WHITE POLYCARBONATE					TWL TWIST LOCK SYSTEM					

Product ordering sample

F362 - L - CAC - LED35W - 3000K - 120~277V - TYPE II - DIM - RAL9011 BLACK