


PRODUCT TECHNICAL DATA SHEET

LED STREET LIGHTING

HD-SL SERIES

Sizes

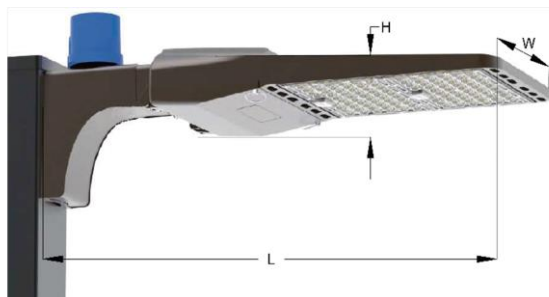

Sizes	L	W	H
Large	30"	12"	4-1/8"
Medium	24"	12"	3-5/8"
Small	17"	12"	3-1/2"

Specification Features

- LED Wattage up to 500W
- Color Temperature 3000K/4000K/5000K
- Lumen Efficacy: 140 Lm/W
- CRI > 80
- Die-Cast aluminum housing
- Quick disconnect driver system mounted on removable plate
- 1-10V dimmable optional
- Twist lock photocell optional
- Suitable for wet locations, IP66
- IES II, III, IV and V
- Warranty: 50,000 hrs
- Working Temperature: -40°C ~ + 55°C
- Bronze powder coated finish (RAL 8019)
- Variety of Mountings

Product Ordering Number



HD-SL SERIES							
Product #	LED WATTAGE	LUMEN OUTPUT	COLOR TEMPERATURE	VOLTAGE	OPTICS	OPTIONS	COLOR
HD-SL-L	500W 400W	68000 Lm 56000 Lm	3000K 4000K 5000K	120V ~ 277V or 240V ~ 480V	IES Type II, III, IV and V	PEC- Twist Lock Photocell Optional	RAL 8019 Bronze
HD-SL-M	300W 240W	41400 Lm 28800 Lm					
HD-SL-S	185W 150W 100W 80W	25160 Lm 21000 Lm 14000 Lm 11200 Lm					