

SL17-LED SERIES

SPECIFICATIONS



Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.
L70 at 50,000 hours with CRI≥70.


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.
Finish is electrostatically applied with thermoset polyester powder-coat.

SIZES


	length	width	height	weight	tenon size	EPA
Large	17"	17"	30"	47 lbs	3"(W) x 4"(L)	3.20 ft ²
Small	-	-	-	-	-	-

PHOTOMETRICS

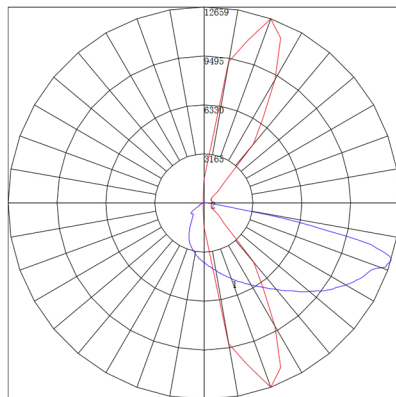

← polar graph

SAMPLE ILLUSTRATION
IES type III, medium

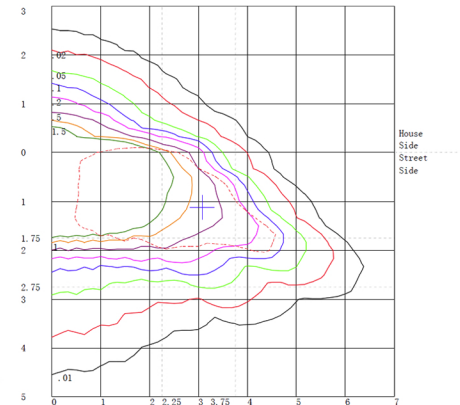

ISO footcandle →

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
SL17	N/A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE II (2)	CHY DECORATIVE CHIMNEY	FA	STANDARD RAL
		CPC CLEAR POLYCARBONATE	35W	4000K				FB	6005 GREEN
		CTG CLEAR TEMPERED GLASS	50W	5000K	STEP DOWN TRANSFORMER	IV (4)	DIM DIMMING CONTROL	FC	7012 GREY
			55W	6000K				FD	8019 BRONZE
		FAC FROSTED ACRYLIC	70W	± 10% VARIANCE	480V	V (5)	DIM DIMMING CONTROL	FE	9011 BLACK
			80W					FF	9016 WHITE
		FPC FROSTED POLYCARBONATE	90W	CUSTOM			FUS INTERNAL FUSING	FG	*TEXTURE AVAILABLE
		120W	FH					CUSTOM RAL	
		WAC WHITE ACRYLIC	FI						
		WPC WHITE POLYCARBONATE	FJ				PCB BUTTON TYPE PHOTOCELL	NONE	
					PEC TWIST LOCK PHOTOCELL				
					TWL TWIST LOCK SYSTEM				

Product ordering sample

SL17 - CAC - LED35W - 3000K - 120~277V - TYPE II - CHY - RAL9011 BLACK