


## LED LIGHTING PANEL

- > High energy efficiency LED panels for offices, schools, hospitality and other commercial applications
- > UL, cUL, and DLC certified
- > White housing
- > Edge-lit LED technology with high efficiency lighting
- > Optical polycarbonate diffuser distributes uniform and glare-free lighting
- > Ultra-thin profile, thickness less than 0.5"
- > Easy installation with minimal maintenance required
- > Limited 5 years warranty


- > Optional recessed, surface and suspended mounting
- > Optional dimmable or non-dimmable feature
- > Operating temperature – 20°C ~ 40°C
- > High power factor ≥0.99
- > CRI ≥80
- > L70 at 50,000 hours
- > Large range of color temperature available
- > Input voltage 100~277V
- > IP 44, suitable for damp location



1' x 4' LED PANEL



2' x 2' LED PANEL




2' x 4' LED PANEL

AVAILABLE IN THREE SIZES

	1' x 4'	2' x 2'	2' x 4'
LENGTH	47.6"	23.6"	47.6"
WIDTH	11.8"	23.6"	23.6"
HEIGHT	0.5"	0.5"	0.5"
WEIGHT	5 lbs	5 lbs	8 lbs

### MOUNTING OPTIONS

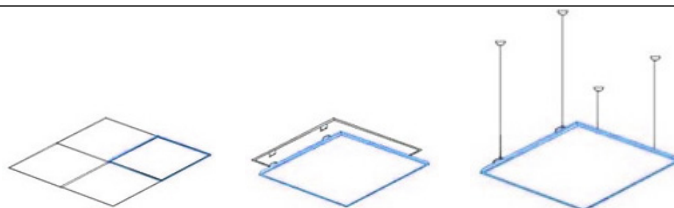

RECESSED

SURFACE

SUSPENDED


### APPROVALS & CERTIFICATIONS






**LED LIGHTING PANEL**


**1' x 4' LED PANEL 40W**

	PRODUCT NUMBER	MOUNTING	LED WATTAGE	COLOR TEMPERATURE	DELIVERED LUMENS	LED TYPE	CRI	OPTIONS	DIMENSIONS
	RMPL-1x4-SMD40LED	RECESSED	40W	3000K	3600 lm	SMD	≥80	DIMMING CONTROL	11.8" X 47.6" x 0.5"
	SMPL-1x4-SMD40LED	SURFACE		4000K					
	SUMPL-1x4-SMD40LED	SUSPENDED		5000K 6000K					
				± 10% VARIANCE				STEP DOWN TRANSFORMER	


**2' x 2' LED PANEL 40W**

	PRODUCT NUMBER	MOUNTING	LED WATTAGE	COLOR TEMPERATURE	DELIVERED LUMENS	LED TYPE	CRI	OPTIONS	DIMENSIONS
	RMPL-2x2-SMD40LED	RECESSED	40W	3000K	3600 lm	SMD	≥80	DIMMING CONTROL	23.6" x 23.6" x 0.5"
	SMPL-2x2-SMD40-LED	SURFACE		4000K					
	SUMPL-2x2-SMD40LED	SUSPENDED		5000K 6000K					
				± 10% VARIANCE				STEP DOWN TRANSFORMER	


**2' x 2' LED PANEL 60W**

	PRODUCT NUMBER	MOUNTING	LED WATTAGE	COLOR TEMPERATURE	DELIVERED LUMENS	LED TYPE	CRI	OPTIONS	DIMENSIONS
	RMPL-2x2-SMD60LED	RECESSED	60W	3000K	5400 lm	SMD	≥80	DIMMING CONTROL	23.6" x 23.6" x 0.5"
	SMPL-2x2-SMD60LED	SURFACE		4000K					
	SUMPL-2x2-SMD60LED	SUSPENDED		5000K 6000K					
				± 10% VARIANCE				STEP DOWN TRANSFORMER	

**2' x 4' LED PANEL 50W**

	PRODUCT NUMBER	MOUNTING	LED WATTAGE	COLOR TEMPERATURE	DELIVERED LUMENS	LED TYPE	CRI	OPTIONS	DIMENSIONS
	RMPL-2x4-SMD50LED	RECESSED	50W	3000K	4500 lm	SMD	≥80	DIMMING CONTROL	23.6" x 47.6" x 0.5"
	SMPL-2x4-SMD50LED	SURFACE		4000K					
	SUMPL-2x4-SMD50LED	SUSPENDED		5000K 6000K					
				± 10% VARIANCE				STEP DOWN TRANSFORMER	

**2' x 4' LED PANEL 75W**

	PRODUCT NUMBER	MOUNTING	LED WATTAGE	COLOR TEMPRETURE	DELIVERED LUMENS	LED TYPE	CRI	OPTIONS	DIMENSIONS
	RMPL-2x4-SMD75LED	RECESSED	75W	3000K	6700 lm	SMD	≥80	DIMMING CONTROL	23.6" x 47.6" x 0.5"
	SMPL-2x4-SMD75LED	SURFACE		4000K					
	SUMPL-2x4-SMD75LED	SUSPENDED		5000K 6000K					
				± 10% VARIANCE				STEP DOWN TRANSFORMER	