

F168 LED Series Pendant



Description

The F168 Series luminaire shall consist of an injection-molded UV stabilized diffuser, a spun aluminum hood assembly, an aluminum cage and an internal optical system. The aluminum cage shall consist of four extruded aluminum struts and a cast aluminum ring welded together. The diffuser shall be secured to the gasketed fitter with stainless steel hardware. The LED shall feature quick disconnect plugs for easy maintenance. The LED shall be factory wired, tested and mounted on a keyholed cast aluminum plate. All electrical components shall be UL listed and labeled.

Specification

Housing

Made from heavy duty cast aluminum to withstand harsh weather.

Hardware

All exposed hardware is made of durable stainless steel, with industrial strength seals.

Interior Design & Optical

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.
L70 at 50,000 hours with CRI ≥ 70 .


Exterior Design & Finish

Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.



Dimensions

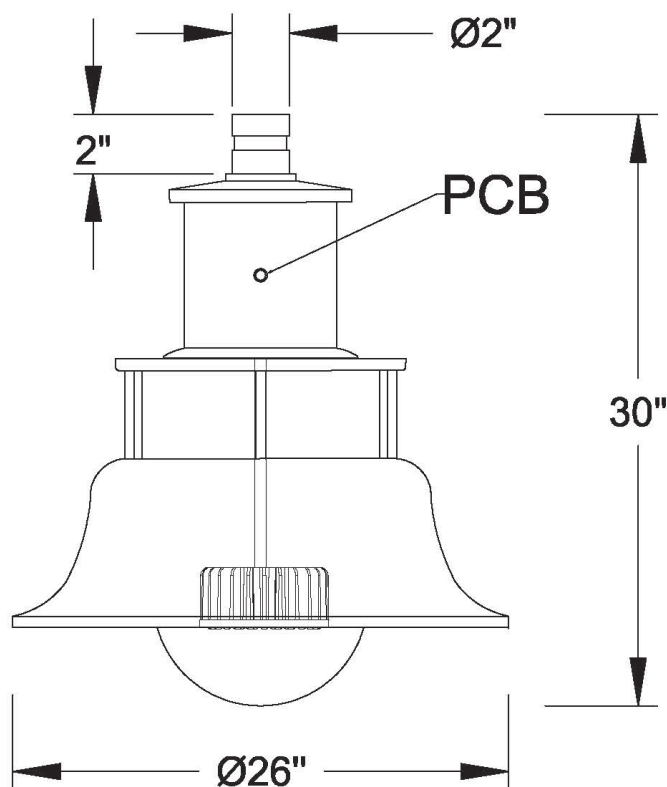

Product Ordering Number

PRODUCT	LUMENS	CCT	VOLTAGE	OPTICS	OPTIONS	FITTER	FINIALS
F168	Max ?	3000K 4000K 5000K 6000K =10% Variance	120v-277v Step down transformer 347V 480V	IES TYPE II (2) III (3) IV (4) V (5)	DIM Dimming control PCB Button type photo- cell HSS House side shield TWL Twist lock system	A, B C, D E, F G, H I, J K, L M, Q R, T U	N/A

DIFFUSER TYPE

CACX Clear acrylic textured
CPCX Clear polycarbonate
 textured
FACX Frosted acrylic textured
WACX White acrylic textured

Color

Standard
 RAL
 6005 Green
 7012 Grey
 8019 Bronze
 9011
 Black/Txt
 9016 White
 Custom RAL

